


COLORADO SPRINGS CITY TRAFFIC SIGNAL INSTALLATION & PARTS SPECIFICATIONS

Effective date 11/1/13

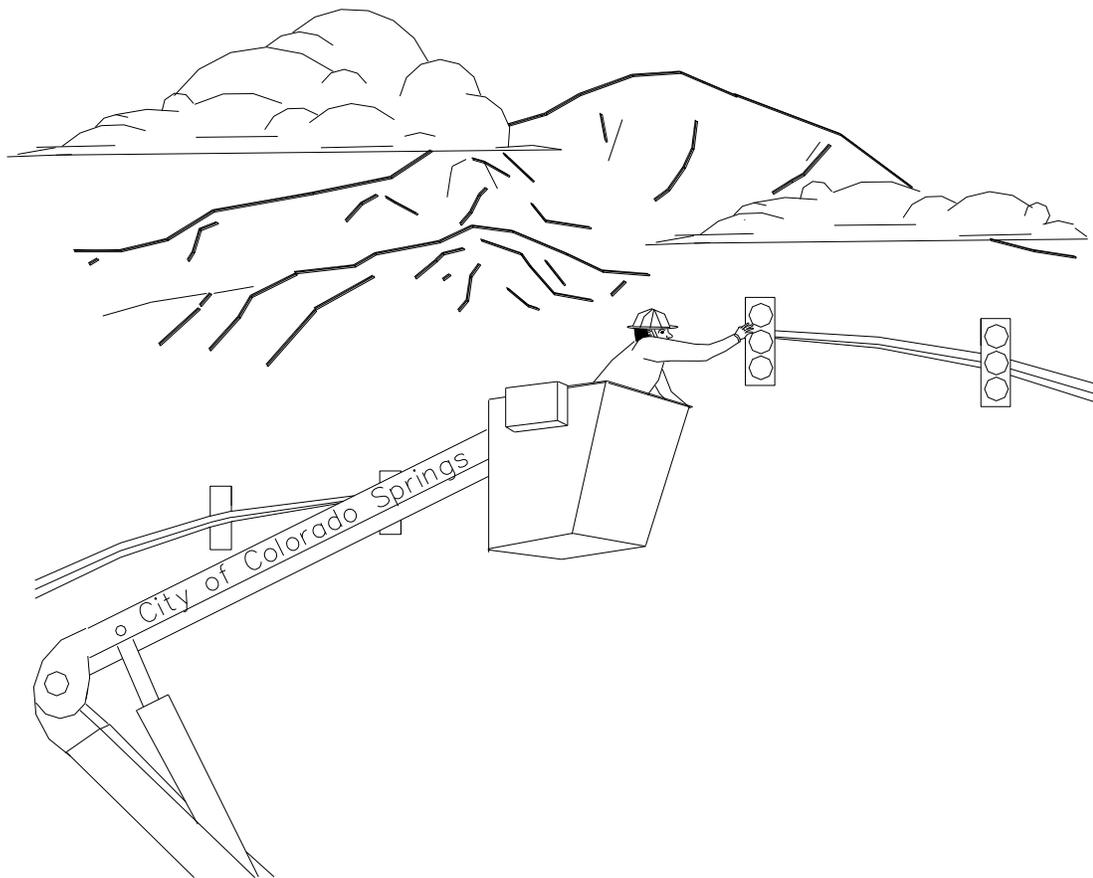

Any changes or specific instructions to this manual will be addressed at the pre-construction meeting. At that time, any questions from the contractor will also be addressed.

COLORADO SPRINGS CITY TRAFFIC SIGNAL

INSTALLATION & PARTS SPECIFICATIONS FOR CONTRACTORS

- 1.0 Traffic Signal Contractor Pre-Qualifications
 - Traffic Signal Contractor Pre-Qualification Questionnaire
- 2.0 General Notes
- 3.0 Equipment approvals
- 4.0 Cable Splicing Policy
- 5.0 Span Wire Profile (Typical)
- 6.0 Standard Signal Cable Color Codes and Usage
- 7.0 Examples of Standard Coding as Applied to Different Cables
- 8.0 Underground Conduit and Pullbox Installation Instructions
- 9.0 Illuminated Street Name Sign
- 10.0 Combination Lighting and Traffic Signal Standards
- 11.0 Traffic Signal Standards and Pole Data
- 12.0 Loading Information (Mast-arm) / (Span Wire)
- 13.0 Traffic Signal Foundations Installation
- 14.0 Traffic Signal Pedestal (Aluminum)
- 15.0 Traffic Signal School Flasher (Steel, Solar)
- 16.0 School Flasher foundation
- 17.0 Power Meter Pedestal and Foundations
- 18.0 Wire Specifications
- 19.0 Galvanized Steel Cable
- 20.0 Traffic Signal Accessories
- 21.0 Conduit Outlet Bodies and Accessories
- 22.0 Traffic Signal Heads – Vehicle
- 23.0 Traffic Signal LED Module (inserts) Specifications
- 24.0 Pedestrian Signals
- 25.0 Break Away Tether Assembly
- 26.0 Entrance Fittings/Signal Head Hangers
- 27.0 Suspension Clamps
- 28.0 Upper Arm Assembly
- 29.0 Single Head Arm Brackets
- 30.0 Pole Mount Fittings
- 31.0 Mast Arm Mounting Bracket Assembles
- 32.0 Pedestrian Pushbuttons
- 33.0 Junction or Pullboxes
- 34.0 Rock Fiber Controller Base
- 35.0 Controller Cabinet Specs
- 36.0 Video Detection

1.0 TRAFFIC SIGNAL CONTRACTOR PRE-QUALIFICATIONS

Contractors hired for the modification or installation of traffic signals, within the jurisdiction of the City of Colorado Springs, shall meet the following requirements:

- 1.1 Shall provide documentation indicating actual installation and modifications of traffic signals completed in the past year. The statement shall include the name of the agency work was performed for and the date the work was completed and be provided to the Traffic Engineer, or Designee, prior to the start of work. (See attached form)
- 1.2 Contractor personnel must be competent in the construction and wiring techniques required for traffic signal installation, have an excellent knowledge of traffic signal controllers and have experience in the operation of traffic signal controllers. An IMSA Level II Traffic Signals Electrician or Technician is required for any work external to the traffic signal cabinet and required to be on job-site at all times to supervise construction. Contractor shall provide the City a copy of the individual's certification prior to the start of work.
- 1.3 A pre-construction meeting will be required with the traffic signal contractor and a representative of the City Traffic Signal Section in attendance prior to the start of work to assure that all material, equipment and work specifications are understood.
- 1.4 Finished product should conform to current Traffic Signal standards for cosmetics as well as quality in workmanship. Contractor shall guarantee materials and workmanship for a period of 2 years

1. TRAFFIC SIGNAL CONTRACTOR PRE-QUALIFICATION QUESTIONNAIRE

PROJECT: _____ DATE: _____

The City of Colorado requires that prospective bidders on Traffic Signal Projects be pre-qualified. To aid in providing information upon which a decision can be made as to the qualifications of each bidder, the following information is requested. Failure to complete the form or false statements therein shall be reason for disqualification.

I. Company Name: _____

Address:

No. of Employees: _____ Years in Existence: _____

Bonding Capacity: _____

II. EXPERIENCE RECORD YEARS DOLLAR VALUE CONSTRUCTED:

Traffic Signals _____

III. Have you contracted with other municipalities on traffic signal projects in the past year?

Yes _____ No _____

If so, please list: _____

IV. Give details of work performed on similar projects: (Use additional sheets, if necessary)

V. List the name(s) of employees(s) who have an IMSA certification as a Traffic Signals Level II Electrician or Technician. (A copy of the certification shall be provided to the City Traffic Engineer prior to the start of work.)

TRAFFIC SIGNAL CONTRACTOR PRE-QUALIFICATION QUESTIONNAIRE

(Continued)

VI. Any involvement in lawsuits? Yes _____ No _____

Explain: _____

VII. References: List at least two (2) references (Name, Address and Telephone Number) having knowledge of the type and quality of work you have performed.

VIII. Additional Remarks

IX. I CERTIFY THAT THE ABOVE STATEMENTS ARE COMPLETE AND TRUE:

(Signature)

(Date)

THE FOLLOWING IS TO BE FILLED IN BY THE TRANSPORTATION DEPARTMENT.

Qualified: _____ Not Qualified: _____ Reason: _____

Director, Transportation Dept.

Date

City Traffic Engineer

Date

Project Engineer

Date

2.0 GENERAL NOTES

ALL WORK WILL BE DONE IN ACCORDANCE WITH:

- 2.1 The standards set by the Traffic Engineer, or Designee, at the pre-construction meeting.
- 2.2 In accordance with the Standards set forth in the “The Manual on Uniform Traffic Control Devices for Streets and Highways.”
- 2.3 Refer to the “Traffic Signal Grounding Methods” manual located on City web site for information on how to ground traffic signal system.
- 2.4 The Contractor shall be responsible for the location of utilities prior to any excavating; and if changes are required, having the Traffic Engineer or Designee relocate the facility.
- 2.5 The Contractor shall be responsible for all barricading, safety precautions (CFR1926), and removal of excess dirt and materials.
- 2.6 Contractor shall be responsible for the digging of pole base hole, providing forms, set up of bolts, conduit stubouts, J-box and the forming, pouring and finishing of concrete. The contractor shall provide all materials.
- 2.7 Concrete to be State Class BZ poured against virgin (undisturbed) soil. All bases shall be vibrated to eliminate air pockets. A copy of signed batch ticket must accompany billing.
- 2.8 Signal foundations shall be trowel finished with stub out directions scribed at edge. (See FIG. 1-3)
- 2.9 Contractor shall contact the Traffic Engineer, or Designee, for inspection of form, bolts and stubout layout 24 hours prior to intent of pour, and (2-hour minimum conformation) prior to pouring concrete. **(Pouring bases without an inspection will result in contractor removing said base and installing a new one at contractor expense within one week)**. Exposed bolt threads and nuts shall be free of concrete and debris. The Traffic Signal Inspector prior to acceptance shall inspect finished base.
- 2.10 Contractor must supply verification of pole data when furnishing own poles.
- 2.11 Finished product should conform to current Colorado Springs City traffic signals standards for cosmetics & quality in workmanship as stated in this document. **If contractor has any questions or doesn’t understand something, then ask for interpretation before continuing work to avoid doing something twice.**
- 2.12 **Conditional Acceptance:** Once construction of a traffic signal has been satisfactorily completed, the signals are “conditionally accepted” by owner. At this time the signal is turned on and the “burn-in” period begins. The burn-in period will last 15 days. During the burn-in period the signal system is allowed to operate under real world conditions. Any malfunction occurring during this period will require a repair or replacement and if the malfunction is serious enough, the burn-in period must be restarted.
- 2.13 **Final Acceptance:** After the burn-in period is completed, all punch list items have been corrected and the contractor has met all contract requirements (such as final clean up of work site, as built drawings and bore logs), the signal will be accepted.
- 2.14 Contractor shall guarantee materials and workmanship for a period of 2 years.

General Notes Continued:

- 2.15 City of Colorado Springs Traffic Signals Division reserves the right to bill contractor for materials and labor for repair and/or replacement of contract work due to faulty craftsmanship during warranty period.
- 2.16 A minimum of two signal heads shall be maintained over traveled lanes when construction on live intersection requires traffic to move from normally traveled lanes. Signal head not over traveled lanes shall be bagged.
- 2.17 If contractor requests Signals Personnel during non-duty hours, (after business hours, weekends and holidays) contractor will be billed for any overtime of personnel. Minimum billing for overtime personnel and vehicles is 2 hours at standard overtime rates.
- 2.18 The contractor shall submit "As-built" or corrected plans showing, in detail, all construction changes including but not limited to, bore logs, pot hole logs, wiring, cable, poles, controller cabinet, detection systems and location of all conduits within 7 days of installation.
- 2.19 All traffic signal equipment that is removed shall remain the property of City of Colorado Springs. Such property is to be returned by the contractor to the 404 W. Fontanero, City Traffic Signals Shop. Contractor must contact Traffic Signals (719-385-6721) to make arrangements for delivery. All traffic signal equipment shall be returned in the same condition as removed.
Poles will be stripped clean of all attached parts before delivery.
- 2.20 Contractor shall at his sole expense, replace or reconstruct sidewalks, curbs, gutters, pavement and any other improvements removed, broken or damaged by contractor with material and methods that conform to current City Standards.
- 2.21 The contractor shall have full maintenance responsibility of the traffic signal from the time of Notice to Proceed to the initial acceptance and/or completion of removals in the case of rebuilds.
- 2.22 All new installations require all vehicle and pedestrian indications to be City of Colorado Springs approved LEDs. Three section signal heads mounted on mast arms shall have back-plates with reflective paint or tape around its border.
- 2.23 Contractors that damages Traffic Signal Systems will be billed for all materials used as well as double time for staff whom are pulled off existing jobs to make the repairs.
- 2.24 Signal heads shall not be installed if a long delay occurs prior to turning signal active. During down time all signal indications shall only be bagged with traffic signal head covers. Signal heads shall not be installed on a new intersection prior to receiving power to meter pedestal.
- 2.25 Acceptable times for turning a new or rebuilt intersection operational is between 9:00 AM Mondays through 12:00 PM Thursdays.
- 2.26 Contractors installing signal foundations shall terminate the signal conduits into a standard j-box with bell ends attached on conduits. Contractor shall furnish all material.
- 2.27 Base mount cabinets shall have a square front and rear concrete pad poured the width of the rock fiber base.

3.0 **EQUIPMENT LIST AND APPROVALS:**

3.1 Bid Requirements

3.2 Contractor shall submit with bid a list of equipment and materials, which he proposes to furnish. Items include all equipment and materials as identified on the plans or in the specifications by manufacturer's name to identify such equipment and materials.

3.3 Item included on the list are: Signal poles and Mast arms, Traffic Signal Controllers and Cabinets, Vehicle and Pedestrian Signal Heads, Pre-emption Devices, Mounting Hardware, Street Name Signs, Pull Boxes, Video Detection System, Wire and any additional items indicated in the project special provisions or requested at the pre-construction meeting.

3.4 **Inspection or sampling of any materials**, other than those already approved, must be made by the Engineer prior to installation. Whenever particular material or equipment is identified by manufacturer name in the plans or specifications, the term "or approved equivalent" is implied. If the contractor proposes a substitution, contractor shall provide additional information **with the bid** to prove the substitution item is of equal or superior quality, and it shall be the City of Colorado Springs Traffic Signals Representative and/or the Engineers discretion whether to approve such substitutions. If not approved, contractor shall agree to supply the originally stated material or equipment at no additional costs. Otherwise, the Engineer may reject the bid as non-responsive.

3.5 The Contractor shall attach to the bid a statement that all material to be supplied is either in exact accordance with the specifications, or shall list in detail any and all substitutions and request the approval of the Engineer for the substitution.

3.6 During execution of the work, the supplying of equipment that is not in accordance with the specifications and which the contractor has not received the Engineer's approval shall be cause for rejection. Correction of the non-specification item will be entirely at the contractor's expense.

4.0 **CABLE SPLICING POLICY** (New and temporary Span installations)


- 4.1 No splice shall be made to a signal cable except in the base of a signal pole. All cables for detection cameras shall be continuous without splices from the camera to the signal cabinet. All power feeds shall be continuous without splicing from the source to the meter and from the meter to the cabinet. At no time shall any cable be permitted to be spliced in a pull box.
- 4.2 **GENERAL-** All signal cable color-coding shall be in accordance with City standards. All conductors with white sheathing shall be reserved for AC neutral returns and no other color shall be used for a return. All whites shall be connected in the cabinet. All splicing shall be carried out in the neatest possible fashion, and cables not involved in a particular splice may not be interwoven with the conductors of a splice. All functions and voltages shall be terminated at the point of last usage, i.e. last signal head, with the exception of ground lines.
- 4.3 **MATERIALS-** Screw type connectors such as Kerney or split bolt connector shall not be used. (No wire nuts). For 14 AWG wire, such as signal cable or detector lead, shall be made using only uninsulated butt splices for 14-16 AWG wire or 10-12 AWG splices for 2 pairs of 14 AWG wires. 10-12 AWG butt splices shall not be crimped with 1 14 AWG wire inserted per end. Termination of wires in controller cabinets shall be made with uninsulated crimp-on forks sized to the wires used. Only one wire shall be used per fork. All crimps on 14 AWG or 10-12 AWG wires shall be made with VACO #1900 crimping tool or equal #. Pin of crimp tool will make contact 180 degrees from seam of butt connectors. Proper sized crimp-on connectors for wires shall be used. Under no circumstances, shall circular mil area of wire be reduced to fit crimp-on connector. Insulating tape used shall be Scotch Brand #88 or #33 only. No substitutes shall be allowed. Some splices require usage of self-vulcanizing rubber tape, in these applications, Okonite low voltage rubber tape or equal shall be used.
- 4.4 **TAPING-**Electrical tape shall be applied in the neatest possible fashion to minimize possibilities of moisture entering the splice and to minimize the possibility of tape unraveling and exposing the splice. Scotch #88 or #33 shall be used to insulate splices and shall be applied so that no less than one tape width extends beyond any live metal and shall be no less than three wraps thick. Overall abrasion and moisture protection shall be provided by no less than three tape wraps. Each wrap shall overlap the previous wrap by ½ the width of the tape. All neutrals shall be insulated and taped like any other conductor. Tape shall be handled in such a manner as to prevent dirt or other materials from contaminating the splice. Any nicked conductors shall be taped.
- 4.5 **HANDHOLE SPLICE-**Splices made in the pole base handholes require attention to ensure that all cables enter the splice in a parallel fashion so that the splice can be pulled safely out of the pole base handhole. No splice shall be made so that repairs or inspection are forced to take place inside the pole. Overall Okoniting is not required on handhole splices. Spare conductors shall not be cut back but shall be individually insulated, folded back and taped. All neutrals will be spliced at pole drop ends. Pole drops shall extend 18” out of handhole and strip sheathing from end of cable to handhole.
- 4.6 **OVERHEAD SIGNAL WIRING-** A service drip loop shall be provided at the signal head in the individual head’s feed cable. This loop shall be 2 coils of cable 12 inches in diameter and

taped to the main cable at the top. Slack in the main cable shall be pulled out and the cable taped to the span wire grips at ends of the span with 2" electrical tape. Drip loop shall be provided next to the poles for the overhead cables. These loops also shall be about 12 inches in diameter and also taped to span wire grips. **Always wire the inside head as if it would have a left turn movement, i.e., use a 7-conductor.**

- 4.7 **PEDESTRIAN PUSH BUTTONS-** Pedestrian push buttons shall have a dedicated continuous wire lead-in to the controller cabinet. Mount pushbuttons between 42" and 48" above the sidewalk
- 4.8 **CABLE SUPPORT RINGS-**All 3" cable support rings shall be 18" apart.
- A. Cables entering signal pole in such a manner that the smaller cables lay on top of the heavier cables.
- 4.9 **HANGING HEAD-** Heads shall be installed at a minimum of 17 feet from street to the bottom of the tether clamp. Heads should be installed with each head attached to the tether. Tether shall look level across the bottom of all heads from one side to the other. All-thread used to hang heads shall be painted yellow or black to match head color. Pole mount and Ped head equipment must be bolted onto signal poles. Cable type ASTRO-BRAC assembly or approved equivalent shall attach heads to the mast-arm.
- 4.10 **POWER RUNS** shall conform to Colorado Springs Utilities standards. Line Feed to meter shall have #6 AWG Stranded wire as a minimum.
- 4.11 **OVERHEAD SIGNS-**Overhead signs such as lane usage or school crossing signs hung on span and tether shall be installed with 2 vertical supports. Each support shall be attached to both span and tether. Each sign support shall be made of aluminum medium extrusion, or large corner angle extrusion channels. Signs are bolted to each vertical channel using 4 lip-lock bolts. Flat backing plate must be used with each span wire clip.

All signs that are greater than 30" wide shall be mounted with a Astro type bracket on the pole or mast arm.

5.0 Span Wire Profile (Typical)

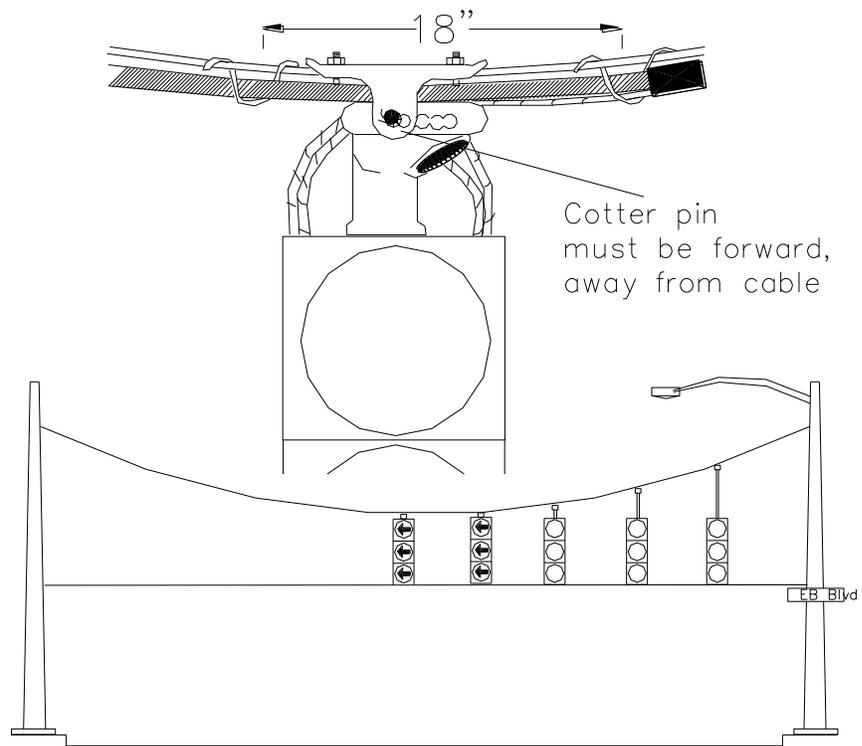

6.0 CABLE COLOR CODES AND USAGE

6.1 The purpose of this instruction is to develop and codify standard color-codes for signal cables and to develop a basis for selecting color codes for nonstandard applications.

6.2 All cable purchased by Traffic Engineering for signal use comes under the IMSA 19-1 1984 specification which sets insulation and performance standards as well as establishing a color sequence. The conductor base color is overlaid with a tracer giving a distinctive and unique color combination for each conductor. The six base colors are:

| | |
|-------|--------|
| BLACK | GREEN |
| WHITE | ORANGE |
| RED | BLUE |

6.3 For a multiconductor cable these colors are repeated as necessary with an appropriate tracer color. The first twenty (20) conductors are:

| | |
|------------------|-----------------|
| 1) BLACK | 11) BLUE/BLACK |
| 2) WHITE | 12) BLACK/WHITE |
| 3) RED | 13) RED/WHITE |
| 4) GREEN | 14) GREEN/WHITE |
| 5) ORANGE | 15) BLUE/WHITE |
| 6) BLUE | 16) BLACK/RED |
| 7) WHITE/BLACK | 17) WHITE/RED |
| 8) RED/BLACK | 18) ORANGE/RED |
| 9) GREEN/BLACK | 19) BLUE/RED |
| 10) ORANGE/BLACK | 20) RED/GREEN |

6.4 As the same colors are used for the tracers as for the base color, it is obvious that the tracer color cannot be applied to its same color, which limits a given tracer color to less than six, but the base colors do nonetheless repeat by groups of six. The IMSA specification also sets a required pattern for cable construction so that for all manufacturers, the cable will be at the center and Black/White will be adjacent to the Blue/Black. This can help locate a conductor if the tracers have been rubbed off. The manufacturer may choose to wrap primary base colors again. When this occurs, the primary base colors will be those closest to the inside wrap and the secondary colors will be those closest to the outside wrap. Secondary colors will be referred to as red 2nd, green 2nd, and black 2nd, etc.

6.5 Conductor colors are always in both written or spoken communications described with the base color first, and the tracer color next. IN print, the (/) is usually used to separate the colors. Verbally, the phrase “with a” is usually inserted to separate the colors. Abbreviated versions of the colors are often used for convenience, these are:

| | |
|-------------|--------------|
| BLACK - BLK | GREEN - GRN |
| WHITE - WH | YELLOW - YEL |
| RED - RED | BLUE - BLU |


7.0 **COLOR CODE: TRAFFIC SIGNAL WIRING**

| PHASE | 25/C | 19&20/C | 12&15/C |
|--------------|---|-----------------------|--------------------|
| 2&6 RD | RD | RD | RD |
| AMB | AMB | AMB | AMB |
| GRN | GRN | GRN | GRN |
| DW | RD/WH | RD/WH | RD/WH(15/C) |
| W | GRN/WH | GRN/WH | GRN/WH(15/C) |
| 4&8 RD | RD/BLK | RD/BLK | RD/BLK |
| AMB | AMB/BLK | AMB/BLK | AMB/BLK |
| GRN | GRN/BLK | GRN/BLK | GRN/BLK |
| DW | BLK/WH | BLK/WH | |
| W | BLU/WH | BLU/WH | |
| 1&5 RD LT | RD 2 nd (RD/BLU) | RD/GRN (20/C) | |
| AMB LT | BLK | BLK | BLK |
| GRN LT | BLU | BLU | BLU |
| 3&7 RD LT | BLK/RD | BLK/RD | |
| AMB LT | AMB/RD | AMB/RD | BLK/WH |
| GRN/LT | BLU/RD | BLU/RD | BLU/BLK |
| SPARES | RD/GRN AMB/GRN BLK 2 ND (BLK/GRN) (Lighted Arterial Signs) GRN 2 ND (GRN/AMB) BLU/BLK | BLU/BLK | BLU/WH(15C) |
| COMMON | WH WH 2 ND WH/BLK WH/RD | WH WH/BLK WH/RD | WH WH/BLK |

8.0 UNDERGROUND CONDUIT AND PULLBOX INSTALLATION INSTRUCTIONS.


- 8.1 Underground conduit shall be 2 or 3 inches (inside diameter) as specified on drawings and shall be C Schedule 80 (PVC) conduit. Conduit shall be buried not less than 24 inches, 30 under all roadways. PVC 90° sweeps shall be connected to conduits with proper PVC fittings, compatible glue, epoxy or compression fittings. Under no circumstances shall improvised fittings or taped together joints be made. Conduit size shall not be changed in a continuous run. Conduit shall be installed in a manner that shall not cause problems in the installation of wire or shall not cause hazards to conduit or cabling due to crush hazards or settling of soil. Bored PVC conduits shall be black with 3-red tracer per Utilities standards.
- 8.2 Conduit crossing under paved streets, alleys or sidewalks shall always include no less than two runs of conduit, and more runs shall be included if specified. Conduit runs for mast arm intersections shall utilize 2-3" and 1-2" conduits minimum, (one 2" for StreetLights and two 3" for Traffic Signals). All other underground conduit runs shall be run in pairs unless single conduit runs are specified. All conduits shall be continuous, free of dirt and debris, and ends of conduit shall be taped to prevent entrance of dirt and water and rodents.
- 8.3 Backfilling: All trenches must be backfilled in lifts. Each lift (approx. 8") must be tamped or compressed. All soil removed from trench shall be placed back in trench.
- 8.4 Bends in conduit shall be made by means of factory prepared radius bends and appropriate couplings. Bends made by heating and bending conduit shall not be allowed unless special permission is granted. Additive total of bends (in degrees) shall under no circumstances be more than 360 degrees between openings of conduit, including upturn bends at pullboxes and bell ends shall be installed on each conduit in j-box.
- 8.5 Conduit entering steel poles shall enter pole base under ground level and thus into pole using PVC conduit. Pole base may not be cut above ground level nor shall conduit cross concrete base. Conduit riser up wooden poles shall be minimum ID 2" and installed in according to Utilities standards. Conduit stubs shall be extended 6" above ground in appropriate quadrants of wood poles per Utilities standards. U-guard will rise up the pole to protect Wire.
- 8.6 Pullboxes shall be (+/- 1") 30" inches long x 17" inches wide x 18" inches in depth. Pullboxes shall be a minimum TIER 15 rated polymer rock fiber concrete or reinforced fiber. Removable top shall be imprinted "TRAFFIC" for signal conduits and shall be secured by stainless steel bolt (1/2" x 13 NC hexhead bolt with washer). Must have easy clean out holes. Under no circumstances shall any underground conduit be terminated at anything but a pole riser or a pullbox. Pullboxes shall be installed so that the pullbox cannot sink. A minimum depth of four inches of gravel shall be placed under the bottom of each pullbox and extend out 6" from box on all sides.
- 8.7 Contractor shall provide and install pullboxes next to each pole base to receive the Traffic Signal conduits extending from the base.

UNDERGROUND CONDUIT AND PULLBOX INSTALLATION INSTRUCTIONS- (continued)

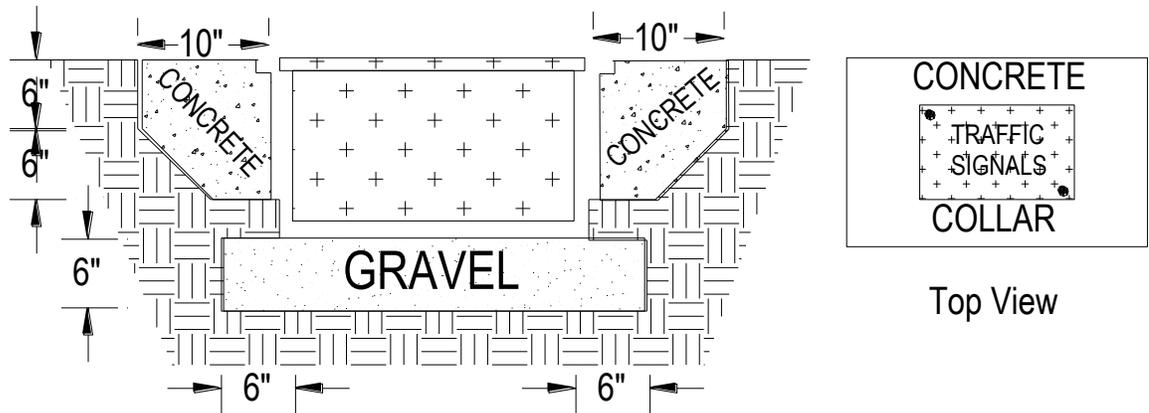


- 8.8 Pull boxes shall have a concrete collar placed around them when used on Highway projects or when Signals inspector determines a need. Pullbox shall be placed so that top of box is 1 inch above grade to prevent water from entering box, with the exception of pullboxes placed in a sidewalk which shall be at grade. Side of pullbox shall not be cut to allow entrance of conduit unless special permission is granted. All conduits entering pullboxes shall be equipped with a 90-degree bend placed so that wire can be pulled out of the box without rubbing against the pullbox. Conduit shall be installed so that open end is approximately 3 inch above ground. Conduits shall be within 3 inches of the side from which conduit enters the pullbox. Where rigid conduit enters pullbox, plastic bushings shall be provided at open end of bend. Rebuilding of underground conduit could involve special circumstances and permission is required from the Traffic Engineer or designee regarding deviations from standards.
- 8.9 Underground conduit runs shall have a pullbox installed every 300 feet maximum, or centered in the run if over 300 feet long. Less than 300 feet requires a pullbox only at terminations.
- 8.10 All underground conduit runs shall have a single 14 AWG (min) wire installed from pullbox to pullbox for locating purposes.
- 8.11 All underground conduits shall have a single ¼ “ Nylon pull rope installed from pullbox to pullbox with a minimum of 3’ of slack in each box and tied off so the rope cannot be accidentally pulled.
- 8.12 Conduits shall terminate in pull-boxes with bell ends installed on each conduit.
- 8.13** Colorado Springs Utilities require underground power runs to be installed using conduit that is black with 3-red tracers. CSU Material Specification 194-2, Appendix-E
- 8.14 Overhead view of typical underground layout (see figure 8.14.1)

8.14.1 Overhead view of typical underground layout

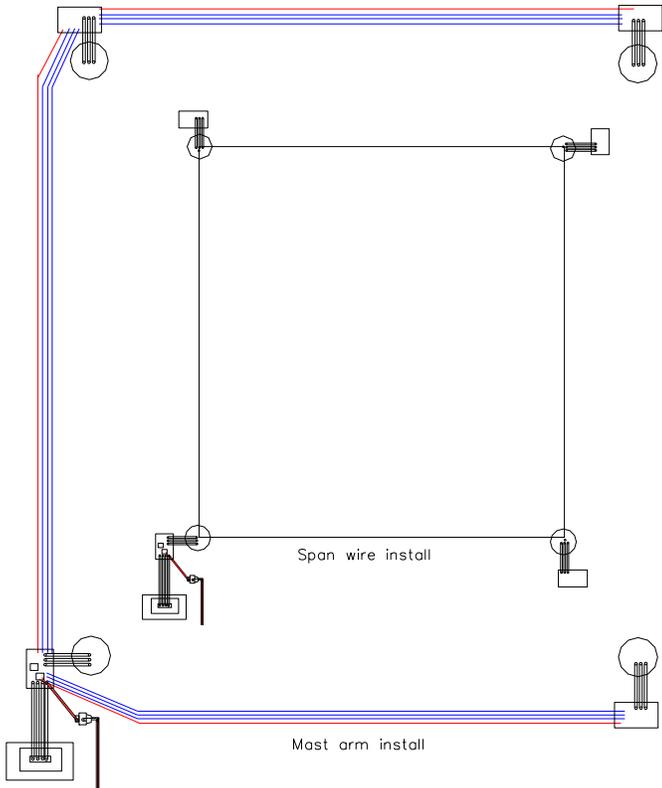

Profile View

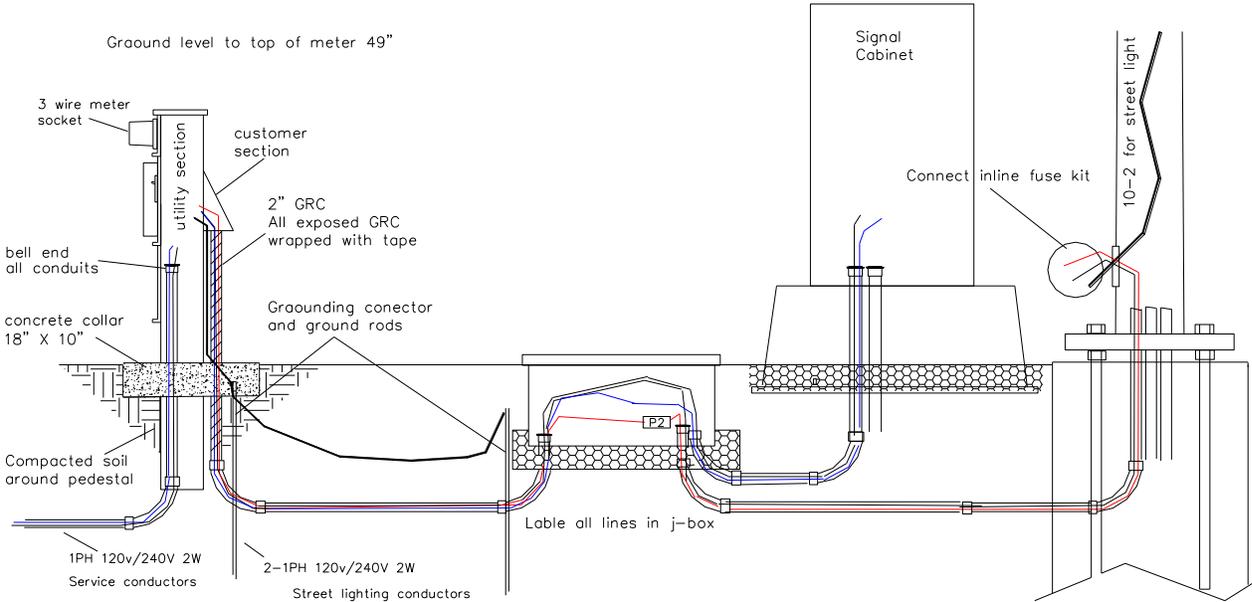

9.0 **Illuminated Street Name Signs Specifications (Southern Manufacturing)**

9.1 **LIGHTING**

- The sign face shall be internally illuminated with LED's (behind the sign face).
- The lighting shall be consistent throughout the face of the sign, free of shadows.
- The LED generator shall be 110V AC.
- Power source shall be UL Class II with UL listing.
- Photocell is required and included.
-

9.2 **SIGN FACE**


- The Sign is to be double sided.
- The Sign face shall be .118" impact resistant polycarbonate and capable of handling wind loads of 110 MPH.
- Sign film (sheeting) is to be green EC film over translucent vinyl.
- Sign face shall be easily detached from door framing.
- The color of the sheeting is to be white lettering with green background
- City will provide layout of sign.
- Factory layout is to be approved prior to production.

9.3 **SIGN HOUSING**

- The Sign housing shall be at a minimum constructed of 5052 H32 .125" extruded aluminum with continuous welded seams.
- Sign shall be UL listed.
- Sign shall have suitable weather protection and drainage channels.
- Housing shall be approximately 7.5" deep at the top and 4.5" deep at the bottom.
- Shall be installed with two (2) pivoting Sign brackets and show no flexing of the sign housing.
- The doors of the sign shall be made in such a way that all corners are welded.
- The doors shall be mounted to the sign with a continuous stainless steel hinge, open in a downward direction and allow access from either side.
- Door latches shall be ¼ turn stainless steel latches. One latch mounted for every 2' of sign. (4' sign = 2, 6' sign = 3 & 8' sign = 4). No tools shall be required to open door or replace sign face. Sign faces shall not be removed by a sliding motion out of the end of the sign.
- The sign housing and door shall be powder coated gloss black.
- Ensure that the Internally Illuminated Sign and equipment furnished have a manufacturer's warranty covering defects in assembly, fabrication, and materials, other than expendable items such as bulbs, for a minimum of 5 years.


9.4 **MOUNTING**

- Two pivoting Sign Brackets with dampener springs are to be ordered with each sign.
- Two spring dampening sign brackets, one fixed and one adjustable, may be used where there is adequate mounting height and separation from signal heads to mount on mast arms. This application needs approval from City Traffic prior to proceeding. This application should only be considered when all signs can be mounted the same for consistency around the intersection.
- Signs (8' & 6') shall be mounted toward the outer end of the mounting arm. (4' sign centered).

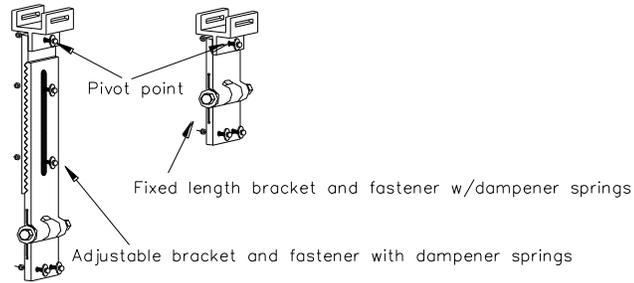

9.5 SIGN Cantilever MOUNTING ARM (if used)

- Illuminated sign will be attached to Sign Mount Arm with 2 fixed spring dampening sign brackets. Other applications may require one adjustable and one fixed bracket.
- Arm should have a 2° rise to compensate for the pole taper.
- Arm shall mount on the signal pole at approximately 24' from ground level.
- Arm shall be made from schedule 40 steel pipe.
- Clamp material to be ASTM designation A36. (36.0 KSI minimum yield strength).
- Clamp connecting bolts shall be high strength ASTM designation A325
- Arm and clamp shall be powder coated black.
- Clamp-on bracket shall be available in ranges to accommodate various pole sizes.

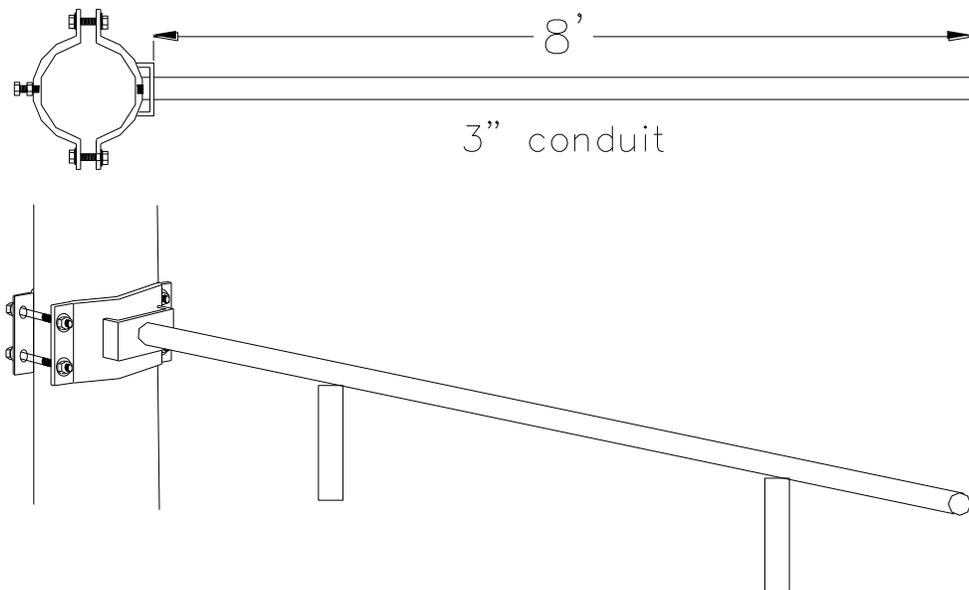


10.0 **Combination Lighting and Traffic Signal Standards**

- 10.1 **GENERAL**-Poles shall consist of tapered pole, round, curved tapered traffic signal mast arm (if required), luminaries arm, hand hole covers, anchor bolts, washers / nuts for anchor bolts and base plate.
- 10.2 **CALCULATIONS**- Calculations and detailed drawings shall include mast arm, luminaries arm, pole, base plate, and anchor bolt analysis. Maximum loads and stresses shall be determined for the most critical wind direction. The pole shall be analyzed in its final deflected position, at the arm to pole connection(s) and pole base. Maximum arm and pole loads, stresses and combined stress ratios (CSR) shall be provided for the specified loading combinations, as well as maximum top of pole dead load rotation. Shaft dimensions shall be equivalent in strength for the loads shown on the drawings.
- 10.3 **POLE**-The pole shall be fabricated from coil or plate conforming to ASTM A572 or A595 Grade A with a minimum yield strength of 55 ksi, and have a constant linear taper of 0.14 in/ft. The shaft shall be one piece, and contain no circumferential welded butt splices. Laminated tubes are not permitted. The pole shall have a reinforced 6.50" x 10.0" handhole with cover located 1'-6" from the pole base. Each pole shall be provided with a decorative end cap secured in place with setscrews. The pole shall be hot dip galvanized and powder coated as specified in the contract documents.
- 10.3.1 The 20' tall pole, w/2.875"OD tenon on top, 16 flute pole shall be formed from tubes conforming to ASTM A595 Grade A with a minimum yield strength of 55 ksi, and have a constant linear taper of 0.14 in/ft. The flutes shall terminate approximately 2" from the base plate connection to facilitate welding and for aesthetic appeal. The shaft shall be one piece, and contain no circumferential welded butt splices. Laminated tubes are not permitted. The pole shall have a reinforced 6.5" x 10.0" handhole with cover located 1'-6" from the pole base. Each pole shall be provided with a decorative end cap secured in place with setscrews. The pole shall be hot dip galvanized and powder coated as specified in the contract documents.
- 10.3.2 **FLUTING PROCESS**-The pole shall be cold rolled over a precision hardened steel mandrel to form a 16-flute shaft. The fluted shaft shall have uniform, equally spaced flutes. The flutes shall be formed with rollers in full contact with the material from the top of the crest, through the valley of the flute, to the top of the next crest. Individually rolled flutes or round poles with a separate fluted sheathing are not permitted.
- 10.4 **MASTARM**- The mast arms shall be round, curved and formed from tubes conforming to ASTM A595 Grade A with a minimum yield strength of 55 ksi, and have a constant linear taper of 0.14 in/ft. Mast arms up to 55' in length shall be manufactured and shipped in one piece. Each arm shall be provided with an end cap secured in place with setscrews. The mast arm shall be hot dip galvanized and powder coated as specified in the contract documents.

- 10.5 **BASE PLATE**-Base plates shall conform to ASTM A36 or ASTM A572. Plates shall be integrally welded to the tubes with a telescopic joint or a full penetration weld joint with a backed ring and is hot dip galvanized and powder coated as specified in the contract documents.
- 10.6 **ANCHOR BOLTS**- Anchor bolts shall conform to the requirements of ASTM F1554. The upper 12" of the bolts shall be hot dip galvanized per ASTM A153. Each anchor bolt shall be supplied with two hex nuts and two flat washers. The strength of the nuts shall equal or exceed the proof load of the bolts. A decorative cast aluminum nut cover shall be provided for each anchor bolt. Each nut cover shall be attached to the pole with a 0.25" stainless steel, self-tapping, hex head screw.
- 10.7 **DESIGN**-Design shall be in accordance with the 1994 AASHTO "Standard Specifications for Structural Supports for Highway Signs, Luminaries and Traffic Signals." Calculations and detailed drawings shall be submitted demonstrating compliance with the AASHTO specification.
- 10.8 **FABRICATOR**- The Fabricator shall be certified under Category I, "Conventional Steel Structures" as set forth by the American Institute of Steel Construction Quality Certification Program. Proof of this certification will be required prior to bid opening to ensure that the fabricator has the personnel, organization, experience, procedures, knowledge, equipment, capability and commitment to fabricate quality Traffic Pole Structures.
- 10.9 **WELDING**-All welding shall be in accordance with Sections 1 through 8 of the American Welding Society (AWS) D1.1 Structural Welding Code. Tackers and welders shall be qualified in accordance with the code. Tube longitudinal seam welds shall be free of cracks and excessive undercut, performed with automatic processes, and be visually inspected. Longitudinal welds suspected to contain defects shall be magnetic particle inspected. All circumferential butt-welded pole and arm splices shall be ultrasonically or radiographically inspected.
- 10.10 **MATERIAL CERTIFICATIONS**-All materials and products shall be manufactured in the United States of America, and comply with ASTM or AASHTO specifications. Mill certifications shall be supplied as proof of compliance with the specifications.
- 10.11 **COMBINATION COATING GALVANIZED-POWDER TOP COAT**- (Surface Preparation)-Prior to being incorporated into an assembled product, steel plates $\frac{3}{4}$ inches or more in thickness shall be blast cleaned when required to remove rolled-in mill scale, impurities and non-metallic foreign materials. After assembly, all weld flux shall be mechanically removed. The iron or steel product shall be degreased by immersion in an agitated 4.5%-6% concentrated caustic solution elevated to a temperature ranging from 150 to 190 degrees Fahrenheit. It shall then be pickled by immersion in a heated sulfuric acid solution of 6%-13% concentration, with a controlled temperature between 150-190 degrees Fahrenheit. It shall next be rinsed clean from any residual effects of the caustic or acid solutions by immersion in a circulating fresh water bath. Final preparation shall be accomplished by immersion in a concentrated zinc ammonium chloride flux solution heated to 130 degrees Fahrenheit. The solution's acidity content shall be maintained between 4.5-5.0 pH. The assembly shall be air dried to remove any moisture remaining in the flux coat and/or trapped within the product.

- 10.12 **ZINC COATING**-The product shall be hot-dip galvanized to the requirements of either ASTM A123 (fabricated products) or ASTM A153 (hardware items) by immersion in a molten bath of prime western grade zinc maintained between 810-850 degrees Fahrenheit. The entire product shall be totally immersed with no part of it protruding out of the zinc (no double dipping). This it to limit a risk of trapped contaminates containing chlorides and reduce the risk of bare spots (bare spots can occur when flux on the steel surface is burned away by heat of the first dip). Maximum aluminum content of the bath shall be 0.01%. Flux ash shall be skimmed from the bath surface prior to immersion and extraction of the product to assure a debris free zinc coating.
- 10.13 **EXTERIOR CAOTING**-All galvanized exterior surfaces shall be coated with a Urethane or Triglycidyl Isocyanurate (TGIC) Polyester Powder to a minimum film thickness of 2.0 mils (0.002”). Prior to application, the surfaces to be powder coated shall be mechanically etched by brush blasting (Ref. SSPC-SP7) and the zinc coated substrate preheated to 450 degrees for a minimum of one hour in a gas fired convection oven. The coating shall be electrostatically applied and cured in a gas fired convection oven by heating the zinc coated substrate to a minimum of 350 degrees Fahrenheit and a maximum of 400 degrees Fahrenheit. The thermosetting powder resin shall provide both intercoat as well as substrate fusion adhesion that meets 5A or 5B classifications of ASTM D3359.
- Poles shall be powder coated over galvanizing Semi Gloss Black/ Polyester TGIC or equivalent.
- 10.14 **PACKAGING**-Prior to shipment poles shall be wrapped for protection.
- 10.15 **Delivery of Mastarms/Poles**-Deliveries shall provide 48 hour notice to Traffic Engineering (Kate Burke-719-385-6721, secondary #719-385-6724) prior to delivery. This is to assure that equipment is available for unloading. Failure to do so will result in denied access into City yard. NO DELIVERIES WILL BE ACCEPTED ON, WEEKENDS AND HOLIDAYS OR WITHOUT 48 HOUR NOTICE.

11.0 Traffic Signal Standards and Pole Data. (Valmont pole drawing this page)

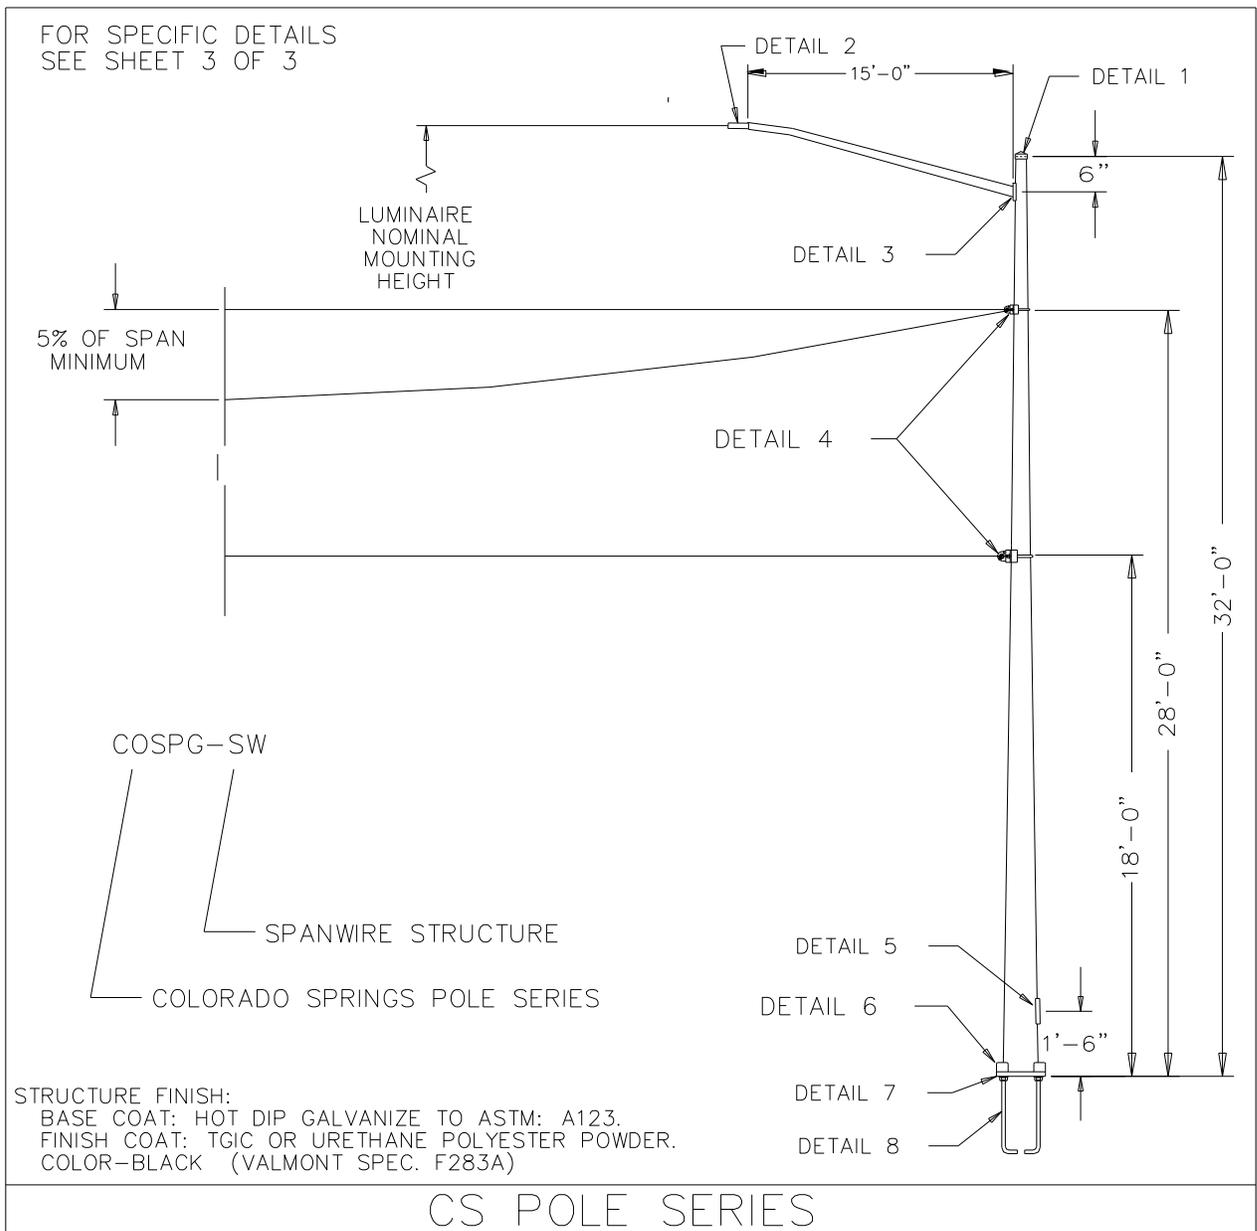

| MATERIAL DATA | | | | | |
|---------------|------------------|------------------|-------------------------|------------------|------------------|
| COMPONENT | ASTM DESIGNATION | MIN. YIELD (KSI) | COMPONENT | ASTM DESIGNATION | MIN. YIELD (KSI) |
| POLE SHAFT | A595 GR. A | 55 | LUMINAIRE TUBE | A595 GR.A | 55 |
| | OR A572 | | LUMINAIRE ATTACHMENT | A36 | 36 |
| BASE PLATE | A36 | 36 | LUMINAIRE CONNECT BOLTS | SAE GR.5 | -- |
| ANCHOR BOLTS | F1554 | 55 | GALVANIZING-HARDWARE | A153 | -- |

11.1 POLE DATA

TABLE 3: (Valmont)


TAPERED ROUND POLES

| Span | Pole Data | | | | Pole Base Data | | | Anchor Bolt Data * | | | |
|------------------|----------------|---------------|-------------|---------------------|---------------------|----------------------|----------------|--------------------|-----------------|---------------|------------------------|
| Signal Span (Ft) | Base DIA. (IN) | Top DIA. (IN) | Length (FT) | Gauge Or Thick (IN) | Square "S" (IN) | Bolt Circle "Y" (IN) | Thick "M" (IN) | DIA. "K" (IN) | Length "J" (IN) | Hook "H" (IN) | Thread Length "U" (IN) |
| Up to 150' | 16.00 | 11.52 | 32.00 | 0.250 | 23.00 x 23.00 | 22.00 | 2.00 | 2.00 | 84.00 | 6.00 | 10.00 |
| 151' – 175' | 18.00 | 13.52 | 32.00 | 0.250 | 29.00 x 26.00 | 24.00 | 2.00 | 2.00 | 84.00 | 6.00 | 10.00 |


All Poles ordered shall include hand hole covers, cable clamp collars, anchor bolt, nuts & washers.
Luminaire arms are optional.

11.2 Typical pole and mast arm (With Decorative Globe)

Used for the downtown only. Color is (Federal Green RAL 6004 with Corothane)
Sherwin Williams should be able to match this. 250W hps equivalent LED, 120V, Dark
Green Housing, Optical Type III, Gold Spike Finial, Gold Bands & Ribs, Button Style
Photocontrol.

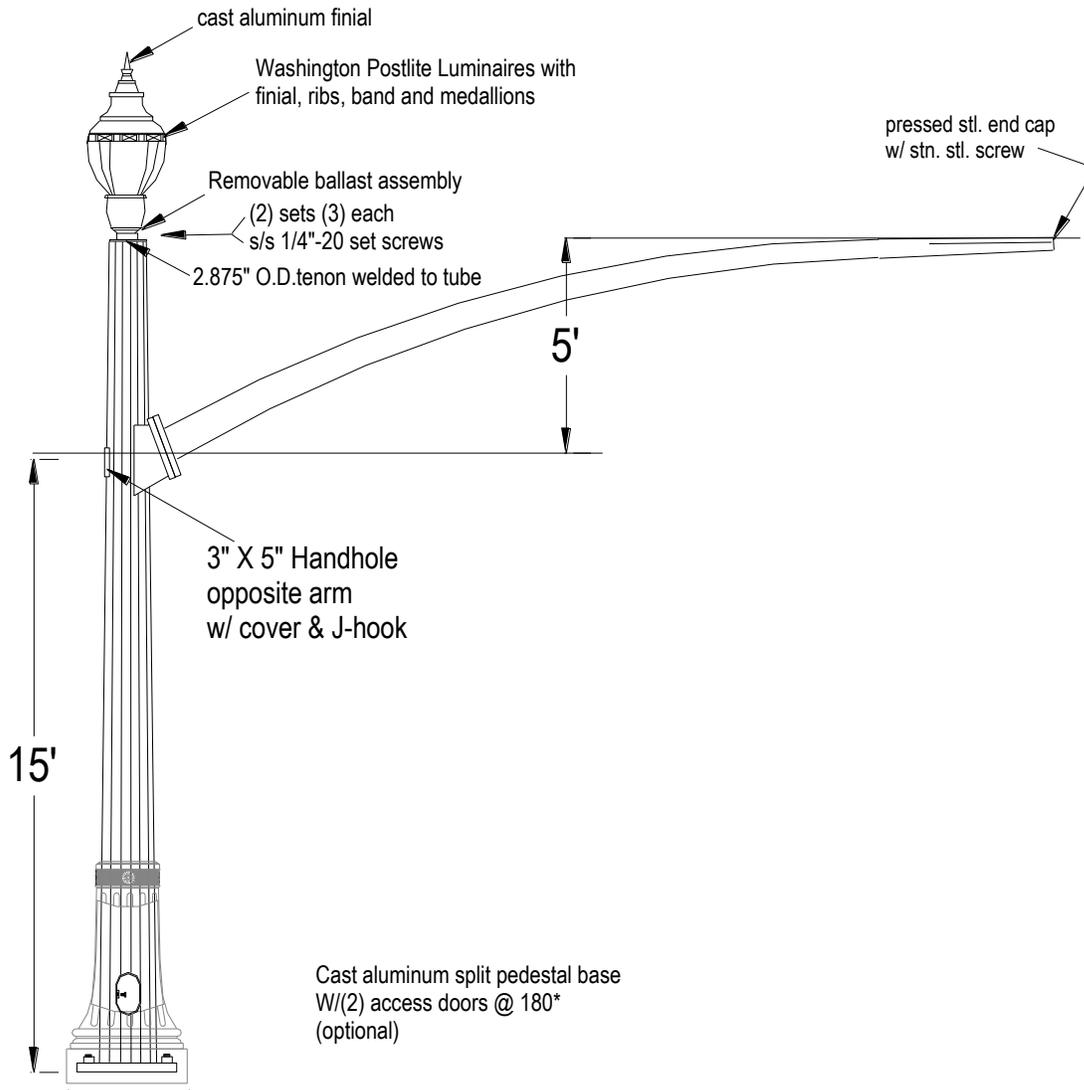


11.3 Typical Pole and Mast arm With Luminaries

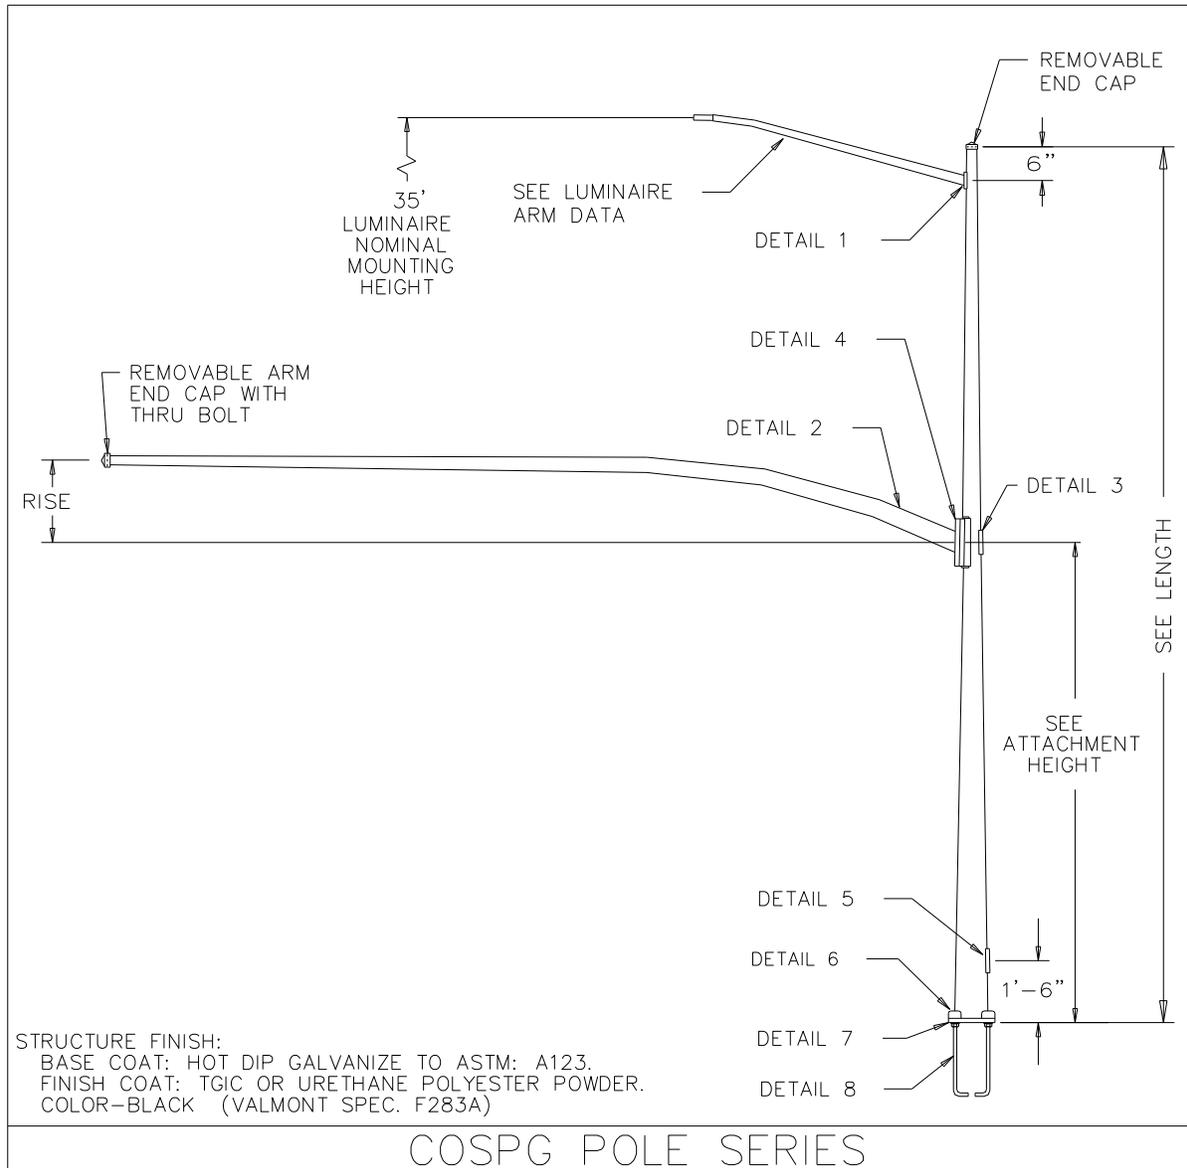


| MATERIAL DATA | | | | | |
|--------------------------|-------------------------|------------------|-------------------------|------------------|------------------|
| COMPONENT | ASTM DESIGNATION | MIN. YIELD (KSI) | COMPONENT | ASTM DESIGNATION | MIN. YIELD (KSI) |
| TAPERED TUBES | A595 GR.A OR A572 | 55 | LUMINAIRE ATTACHMENT | A36 | 36 |
| | | | LUMINAIRE CONNECT BOLTS | SAE GR.5 | -- |
| | | | GALVANIZING-HARDWARE | A153 | -- |
| BASE PLATE | A36 | 36 | | | |
| SIGNAL ARM ATTACHMENT | A36 | 36 | | | |
| SIGNAL ARM CONNECT BOLTS | A325 | -- | | | |
| ANCHOR BOLTS | F1554 | 55 | | | |


11.4 POLE and MAST ARM DETAILS_(VALMONT)

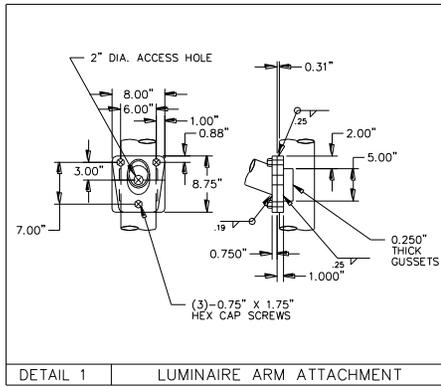

DETAIL 1 LUMINAIRE ARM ATTACHMENT

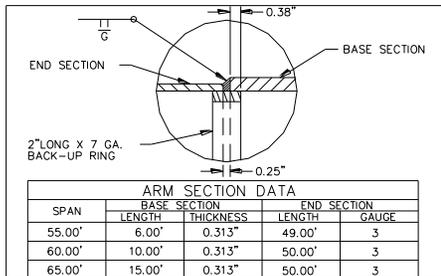


DETAIL 2 WELDED SIGNAL ARM SPLICE

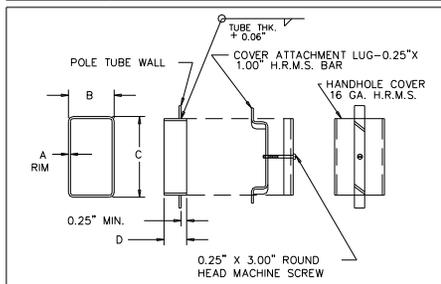


| POLE GA. | A | B | C | D |
|------------|-------|-------|-------|-------|
| 5 | 7 GA. | 3.00" | 5.00" | 1.50" |
| ALL OTHERS | 0.50" | 4.00" | 6.00" | 2.50" |

DETAIL 3 HANDHOLE

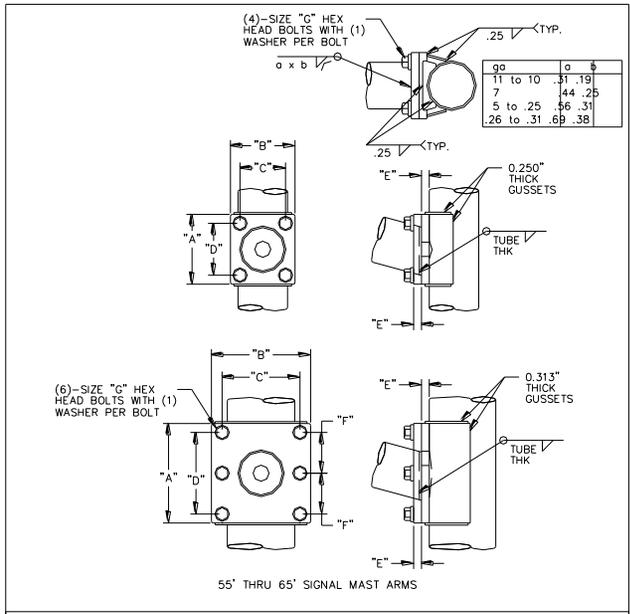


| SPAN | "A" | "B" | "C" | "D" | "E" | "F" | "G" |
|--------|-------|-------|-------|-------|------|-------|---------------|
| 20.00' | 16.25 | 15.00 | 11.00 | 12.25 | 1.50 | | 1.50" x 3.25" |
| 25.00' | 16.25 | 15.00 | 11.00 | 12.25 | 1.50 | | 1.50" x 3.25" |
| 30.00' | 16.25 | 15.00 | 11.00 | 12.25 | 1.50 | | 1.50" x 3.25" |
| 35.00' | 17.00 | 16.00 | 12.00 | 13.00 | 1.75 | | 1.50" x 3.75" |
| 40.00' | 17.00 | 16.00 | 12.00 | 13.00 | 1.75 | | 1.50" x 3.75" |
| 45.00' | 17.75 | 17.00 | 13.00 | 13.50 | 2.00 | | 1.50" x 4.25" |
| 50.00' | 17.75 | 17.00 | 13.00 | 13.50 | 2.00 | | 1.50" x 4.25" |
| 55.00' | 24.00 | 24.00 | 20.00 | 20.00 | 2.00 | 10.00 | 1.50" x 4.25" |
| 60.00' | 24.00 | 24.00 | 20.00 | 20.00 | 2.00 | 10.00 | 1.50" x 4.25" |
| 65.00' | 24.00 | 24.00 | 20.00 | 20.00 | 2.00 | 10.00 | 1.50" x 4.25" |


DETAIL 4 SIGNAL ARM ATTACHMENT

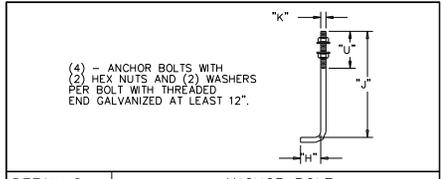


DETAIL 8 ANCHOR BOLT

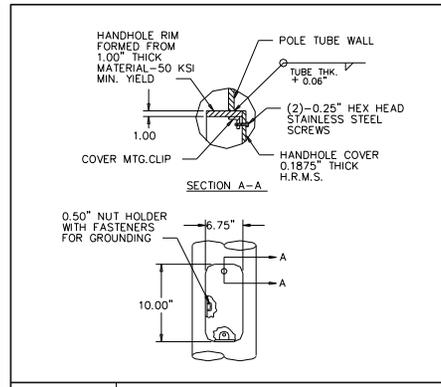

DETAIL 5 HANDHOLE

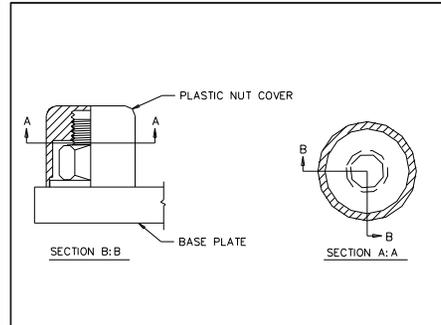

DETAIL 6 NUT COVER

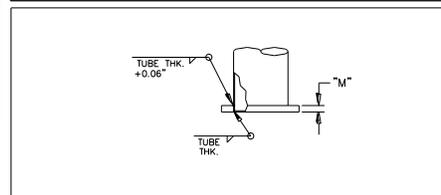


DETAIL 7 POLE BASE

11.5 POLE and MAST-ARM SCHEDULE (Valmont)

| Pole Data | | | | Base Plate Data | | | Anchor Bolt Data | | | | Mast Arm Data | | | | | |
|---------------|--------------|-------------|--------------|-----------------|----------------------|--------------|------------------|-----------------|---------------|------------------------|--------------------|-------------------|-------|------------|-----------|-------------------------|
| Base DIA (in) | Top DIA (in) | Length (ft) | Gauge or THK | square "S" (in) | Bolt Circle "Y" (in) | THK "M" (in) | DIA "K" (in) | Length "J" (in) | Hook "H" (in) | thread length "U" (in) | Fixed End Dia (in) | Free End Dia (in) | Gauge | Span (Ft) | Rise (Ft) | Attach-ment Height (Ft) |
| 12.5" | 8.02" | 32.00 | 5 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 8.00" | 5.13 | 7 | 20' | 3' | 17' |
| 12.5" | 8.02" | 32.00 | 5 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 9.00" | 5.44 | 7 | 25' | 3' | 17' |
| 12.5" | 8.02" | 32.00 | 5 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 10.00 | 5.74 | 7 | 30' | 3' | 17' |
| 14.0" | 9.52" | 32.00 | 0.250 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 11.00 | 6.04 | 7 | 35' | 4' | 16' |
| 14.0" | 9.52" | 32.00 | 0.250 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 12.00 | 6.34 | 7 | 40' | 4' | 16' |
| 15.5" | 11.02 | 32.00 | 0.250 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 13.00 | 6.65 | 7 | 45' | 4' | 16' |
| 15.5" | 11.02 | 32.00 | 0.250 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 13.00 | 5.95 | 5 | 50' | 4' | 16' |
| 16.5" | 12.02 | 32.00 | 0.313 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 13.50 | 5.69 | Det.2 | 55' | 5' | 15' |
| 16.5" | 12.02 | 32.00 | 0.313 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 14.05 | 6.05 | Det.2 | 60' | 5' | 15' |
| 16.5" | 12.02 | 32.00 | 0.313 | 23" | 22" | 1.75 | 2.00 | 84.00 | 6.00 | 10.00 | 14.75 | 6.05 | Det.2 | 65' | 5' | 15' |
| | | | | | | | | | | | | | | | | |

12.0 LOADING INFORMATION (MAST-ARM)

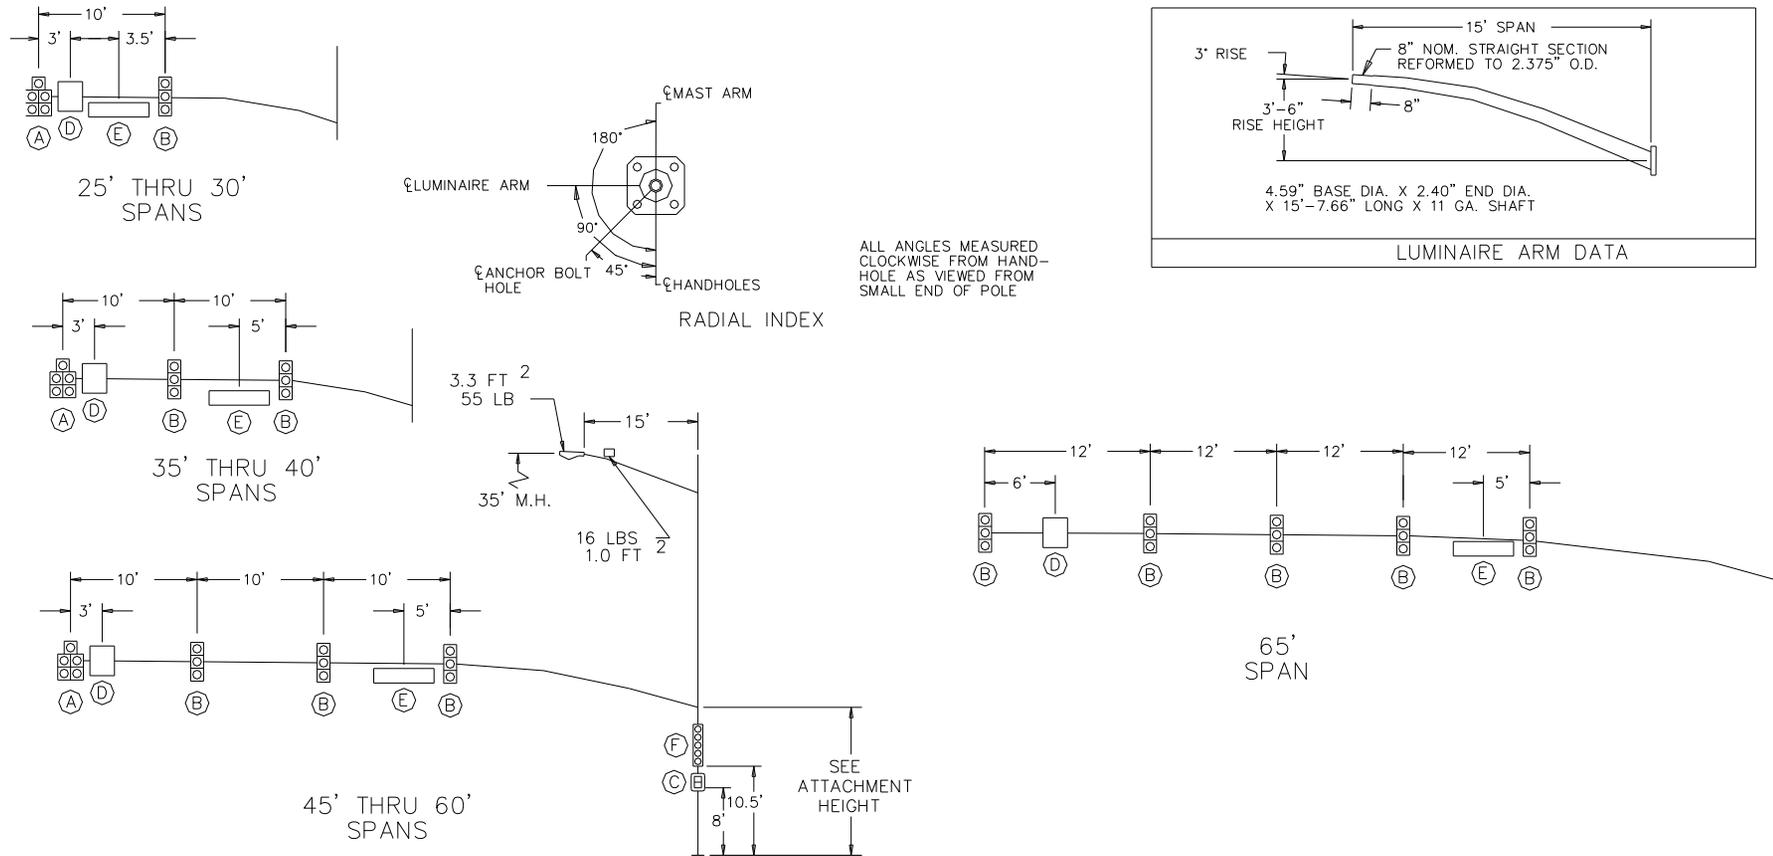

DESIGN CRITERIA:

1994 AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS

WIND VELOCITY:

90 MPH ISOTACH.


12.1 LOADING INFORMATION (SPANWIRE)

DESIGN CRITERIA:

- 1) 1994 AASHTO STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORTS FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS
- 2) ALL STRUCTURES ARE DESIGNED TO SUPPORT THE MAXIMUM LOADINGS SHOWN WITH A MINIMUM SPAN WIRE OF 5% AND TETHERS WIRES THAT BREAK AWAY AT A MAXIMUM LOAD OF 900 LBS.
- 3) THE TRAFFIC SIGNALS AND SIGNS SHOWN MAY BE PLACED AT ANY LOCATION ON THE SPAN WIRE, PROVIDED THAT THE MINIMUM SPACING SHOWN IS MAINTAINED.
- 4) ALL STRUCTURES ARE DESIGNED TO SUPPORT A 12'-0" MAXIMUM LENGTH LUMINAIRE ARM AT A 35'-0" MAXIMUM LUMINAIRE MOUNTING HEIGHT, WHILE SUPPORTING A LUMINAIRE HAVING A MAXIMUM PROJECTED AREA OF 5.3 FT. SQ. AND A MAXIMUM WEIGHT OF 71 LBS.

WIND VELOCITY:


80 MPH ISDTACH.

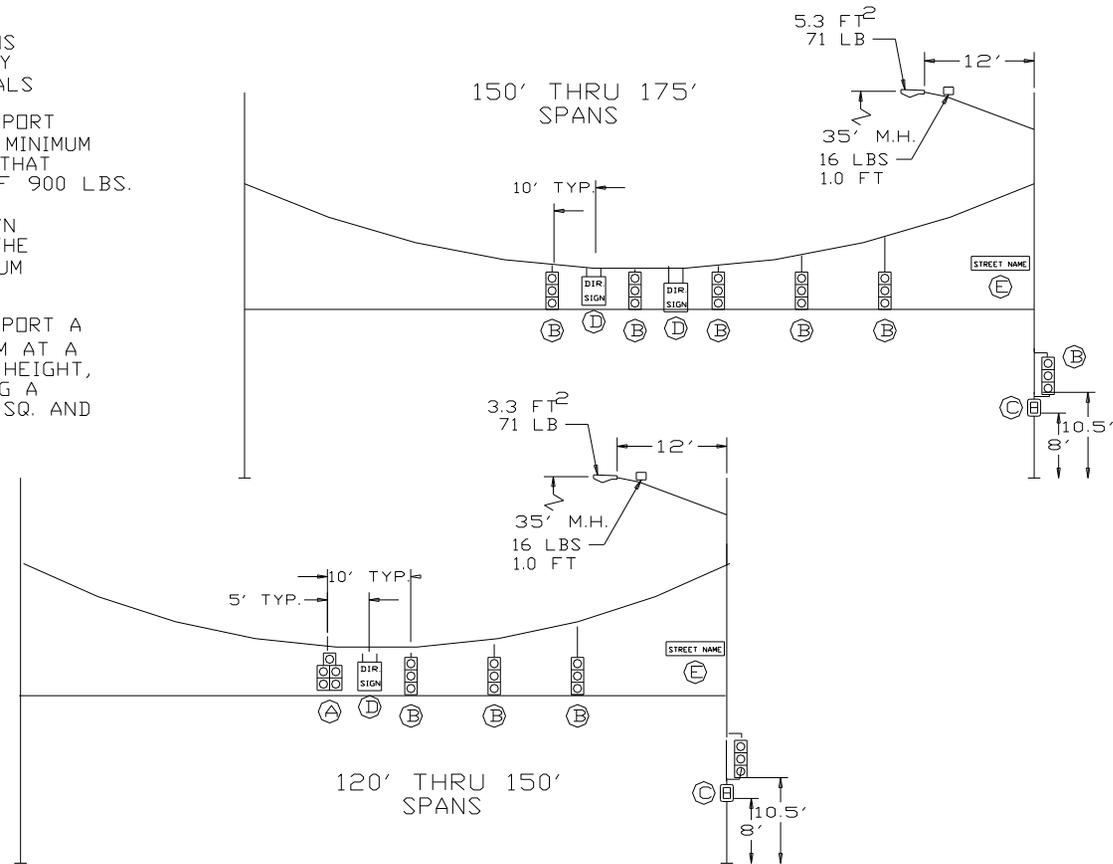


| DEVICE | DESCRIPTION | PROJ.AREA (FT ²) | WEIGHT (LBS) |
|--------|-------------------------------------|------------------------------|--------------|
| (A) | 12"-5 SEC. SIGNAL WITHOUT BACKPLATE | 6.81 | 57 |
| (B) | 12"-3 SEC. SIGNAL WITH BACKPLATE | 4.08 | 38 |
| (C) | DUAL-2 SEC-PEDESTRIAN | 8.00 | 50 |
| (D) | 30" X 36" REGULATORY SIGN | 7.50 | 12 |
| (E) | 18" X 96" STREET NAME SIGN | 12.00 | 75 |

13.0 TRAFFIC SIGNAL FOUNDATIONS


- 13.1 Foundation General notes:
- 13.2 Concrete = class BZ. Reinforced steel per ASTM A615 specification, grade 60 for all bars.
- 13.3 Shaft for concrete foundation to be drilled by mechanical auger.
- 13.4 Foundation design requires that the shaft be founded in compact sand, clay, or sandy clay. If by visual inspection of the hole other material is present, the foundation design shall be modified as determined by the engineer.
- 13.5 Concrete shall be poured in lifts not exceeding 3 feet in depth. At the pouring of each lift, concrete shall be mechanically vibrated to remove air pockets.
- 13.6 Foundation shall be poured 7 to 10 days in advance of pole installation.
- 13.7 When ambient temperature is below (40°F) poured foundations shall be covered with blankets and /or straw per direction of the Engineer.
- 13.8 Concrete poured at a depth greater than 14' shall use a chute to pour.
- 13.9 Foundation shall be poured monolithic to finished grade-(No cold joints).
- 13.10 All anchor bolts shall be ASTM F1554 Grade 55.
- 13.11 Foundation depths vary, per the standard sheet.
- 13.12 Grounding Details. Refer to **“City of Colorado Springs Traffic Signal Grounding Methods”** manual for greater details. Manual is located on City web site: [Springsgov.com/City engineering/Reference Materials/Standard Specifications & Traffic Manuals](http://Springsgov.com/City%20engineering/Reference%20Materials/Standard%20Specifications%20&%20Traffic%20Manuals).
 - 13.12.1 Equipment Grounding Conductor (EGC) Use at least 10 gauge, insulated, green, stranded copper. Refer to “City of Colorado Springs Traffic Signal Grounding Methods” manual.
 - 13.12.2 Ground pole using UFER grounding electrode conductor (GEC)- at least 4gauge, Bare, stranded copper.
 - 13.12.3 Connect to rebar cage of concrete foundation using clamp suitable for submersion in concrete.
- 13.13 Contractor shall install j-boxes next to each signal pole foundation.
- 13.14 Traffic Signal Foundations-(Typical). (See next page.)

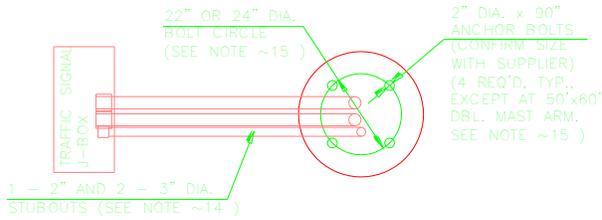

TYPICAL PLAN VIEW

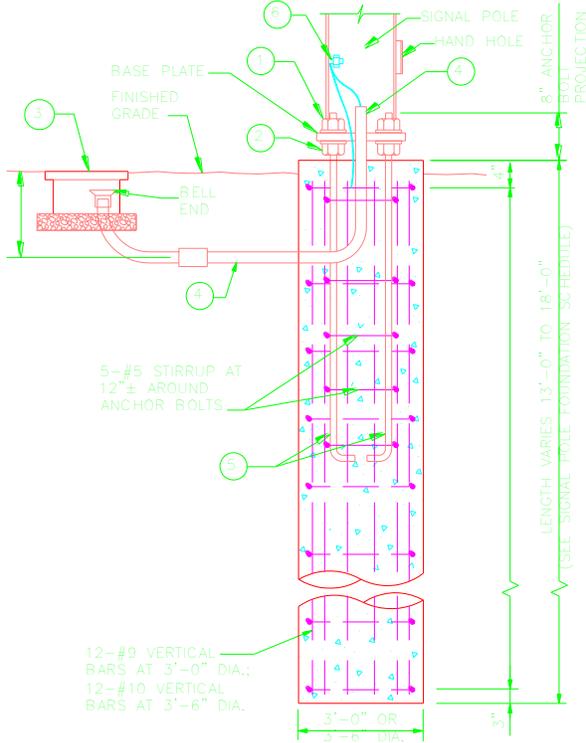

TYPICAL ELEVATION

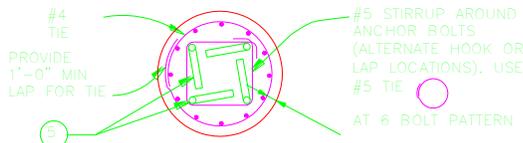

TRAFFIC SIGNAL POLE FOUNDATION SECTION

| SINGLE MAST ARM SIGNAL POLE FOUNDATION SCHEDULE | | | DOUBLE MAST ARM SIGNAL POLE FOUNDATION SCHEDULE | | | |
|---|----------------------|---------------------------|--|----------------------|--------------------|---------------------|
| MAST ARM LENGTH(FT) | BOLT CIRCLE DIA.(IN) | CAISSON DIA.(IN) | MAST ARM LENGTHS (FT x FT) | BOLT CIRCLE DIA.(IN) | CAISSON DIA.(IN) | CAISSON LENGTH (FT) |
| 20 | 22 | 36 | 20 to 50 | 22 (4 BOLTS) | 36 | 18 |
| 25 | 22 | 36 | 30 to 50 | | | |
| 30 | 22 | 36 | 30 x 60 35 x 60 40 x 60 45 x 55 45 x 60 50 x 55 | 24 (4 BOLTS) | 42 | 18 |
| 35 | 22 | 36 | | | | |
| 40 | 22 | 36 | | | | |
| 45 | 22 | 36 | | | | |
| 50 | 22 | 36 | | | | |
| 55 | 22 | 36 | 50 x 60 (6 BOLTS) | 24 (6 BOLTS) | 42 | 18 |
| 60 | 22 | 36 | | | | |
| 65 | 22 | 36 | | | | |
| SPAN WIRE POLE FOUNDATION SCHEDULE | | MAX. SPAN WIRE LENGTH(FT) | BOLT CIRCLE DIA.(IN) | CAISSON DIA.(IN) | CAISSON LENGTH(FT) | |
| | | 150 | 22 | 36 | 16 | |
| | | 175 | 24 | 42 | 17 | |

DETAIL NOTES

- HEAVY HEX-NUTS & FLAT WASHERS
- HEAVY HEX LEVELING NUTS & WASHERS
- J-BOX
- PROVIDE ONE (1) - 2" DIAMETER SCHEDULE 40 PVC CONDUIT (24" MIN. DEPTH, 30" MIN. DEPTH UNDER ROADWAY) & TWO (2) - 3" DIAMETER SCHEDULE 40 PVC CONDUITS TO THE TRAFFIC SIGNAL J-BOX. INSTALL BELL ENDS ON EACH CONDUIT.
- INSTALL ANCHOR BOLTS (FURNISHED WITH POLE) PER MANUFACTURER'S TEMPLATE (FURNISHED WITH ORDER). ORIENT HOOKS SUCH THAT A CONCRETE PUMP HOSE CAN ACCESS THE BOTTOM OF THE EXCAVATION.
- GROUNDING NUT. SEE SECTION 13.12 FOR INFORMATION ON GROUNDING REQUIREMENTS.

FOUNDATION DESIGN AND CONSTRUCTION NOTES

- THE STANDARD SIGNAL FOUNDATIONS SHOWN ON THIS DRAWING SHALL ONLY BE USED WITH THE CITY OF COLORADO SPRINGS STANDARD SIGNAL PLANS, AS DEVELOPED BY VALMONT INDUSTRIES.
- ALL WORK SHALL BE IN ACCORDANCE WITH THE COLORADO SPRINGS CITY TRAFFIC SIGNAL INSTALLATION AND PARTS SPECIFICATIONS.
- ALL CAISSON CONCRETE SHALL BE CDOT CLASS BZ, $f'_c = 4000$ psi.
- ALL REINFORCING STEEL SHALL BE GRADE 60, $f_y = 60,000$ psi.
- ANCHOR BOLTS SHALL BE ASTM F1554 MODIFIED TO 55 ksi YIELD STRENGTH. ANCHOR BOLTS SHALL BE FURNISHED BY SIGNAL POLE MANUFACTURER.
- THE SIGNAL FOUNDATION DESIGN SHOWN ON THIS DRAWING ASSUMES THE MINIMUM SOIL CHARACTERISTICS AS WOULD BE TYPICALLY ENCOUNTERED IN COLORADO SPRINGS WHICH ARE NOTED BELOW. IN THE EVENT THAT SOFT SOIL CONDITIONS (A BLOW COUNT OF $N < 8$) ARE ENCOUNTERED, A SITE SPECIFIC GEOTECHNICAL EVALUATION AND FOUNDATION DESIGN WILL BE NECESSARY. ASSUMED GEOTECHNICAL DESIGN PARAMETERS:

SOIL DENSITY ($\sim g$) = 120 pcf
 SOIL COHESION = 750 psf
 ANGLE OF INTERNAL FRICTION (ϕ) = 26°
 HORIZONTAL MODULUS OF SUBGRADE REACTION (K) = 77 Tcf
 $E_{50} = 0.01$ in/in

- IF THE FOLLOWING SITUATIONS ARE ENCOUNTERED DURING DRILLING, CONTACT THE CITY OF COLORADO SPRINGS ENGINEER:


- SIGNALS WILL NOT BE INSTALLED WITHIN THE ROADWAY PRISM.
- THE SOIL HAS A HIGH ORGANIC CONTENT OR CONSISTS OF SATURATED SILT AND CLAY.
- THE SITE WON'T SUPPORT THE WEIGHT OF THE DRILLING RIG.
- THE FOUNDATION SOILS ARE NOT HOMOGENEOUS.
- FIRM BEDROCK IS ENCOUNTERED.

- PRIOR TO POURING CONCRETE, ANCHOR BOLT THREADS SHALL BE OILED. BOLT POSITIONS SHALL BE ACCURATE TO 1/8" +/- . BOLTS SHALL BE ACCURATELY SQUARE WITH CURB LINE.
- PRIOR TO POURING CONCRETE, CONDUITS SHALL BE TAPED. CONDUIT DIRECTIONS ARE TO BE DETERMINED BY THE TRAFFIC ENGINEER OR FIELD REPRESENTATIVE. MARK ALL CONDUIT RUNS ON TOP OF THE CONCRETE BASE. MARKS SHOULD BE 2" FROM THE PERIMETER OF THE BASE.
- CAISSONS SHALL BE PLACED AGAINST UNDISTURBED EARTH. CONCRETE SHALL BE VIBRATED.
- A MINIMUM OF 3" CONCRETE COVER SHALL BE MAINTAINED AROUND THE STEEL CAGE. A MAXIMUM OF 4" OF COVER IS ALLOWED AT THE TOP OF THE CAGE.
- ALL CONDUIT STUBS SHALL EXTEND FREELY BEYOND THE POUR AND SHALL BE FITTED WITH A COUPLING ON EACH STUB. STUBS SHALL BE TAPED TO PREVENT ENTRY OF DIRT OR CONCRETE.
- LOOSE DIRT SHALL BE REMOVED FROM THE BOTTOM OF THE HOLE PRIOR TO POURING CONCRETE.
- TRASH SHALL NOT BE THROWN INTO THE HOLE.
- THE BASE SURFACE SHALL BE SMOOTH FINISHED WITH A STEEL TROWEL AND HAVE A LIGHT BROOM FINISH.
- THE BASE TOP SHALL BE FLUSH TO SIDEWALK GRADE OR, IF NO ATTACHED TO SIDEWALK, 1" ABOVE GRADE.
- NO COLD JOINTS ARE ALLOWED IN CAISSONS. POUR CAISSONS CONTINUOUSLY TO FINISHED GRADE.
- POLE FOUNDATION MAY ALTER IN DEPTH AND/OR DIAMETER, AS APPROVED BY THE CITY'S TRAFFIC ENGINEER. THE CITY SHALL APPROVE MODIFICATIONS NEEDED FOR THE CAISSONS DUE TO UNFORESEEN CONDITIONS.
- BASE DIMENSIONS AND BOLT CIRCLE PATTERN MAY VARY FROM THE STANDARD, BUT ONLY UPON APPROVAL BY THE CITY TRAFFIC ENGINEER.

14.0 TRAFFIC SIGNAL PEDESTAL


Spun Aluminum for galvanized intersections and Powder Coated Gloss Black when used with a black colored intersection.

- 14.1 Pedestal poles shall be designed to meet AASHTO 90 MPH wind velocity. 10' minimum pole threaded for square base pedestal; to include pole, cap, base and anchor bolts. Pole shall be aluminum 4.5 inches in diameter and twelve feet high with one end threaded for base. Base shall be cast aluminum with a 6-3/8 inch mounting radius, 15 inches high, threaded to receive 4.5-inch aluminum pole. Threads shall be 4" NPSM. Anchor bolts shall include 8 nuts and 8 washers, be 3/4 inches in diameter, 18 inches in length and shall have an "L" bend at the bottom. One 8' grounding rod shall be installed. **All hardware shall be bolted to the pole.**
- 14.2 Foundations for pedestrian push button poles are the same except for the depth, which will be 24" and no ground rod required.

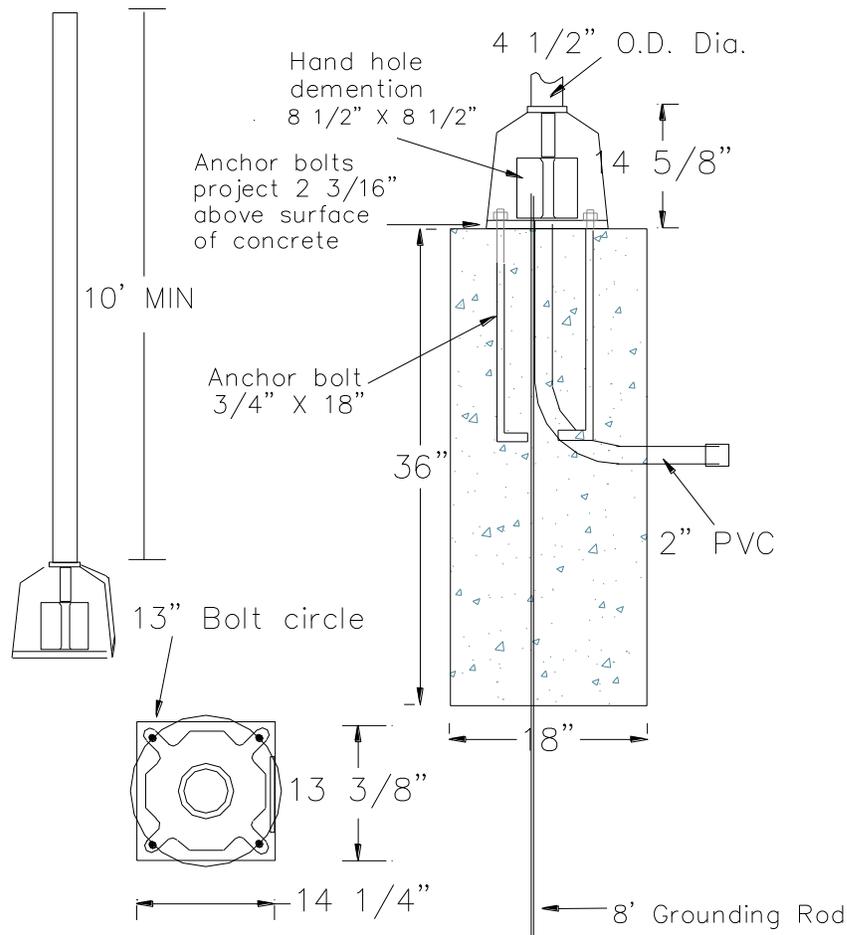

15.0 TRAFFIC SIGNAL SCHOOL FLASHER

Pole and pole base shall be made of steel and black powder coated Semi-Gloss Black during fabrication. Pole shall be schedule 40, 4.5 inches in diameter, 15' high and one end threaded for base. Threads shall be 4" NPSM. Unit shall have 3 flashing indications. 2 indications shall face motorists as they approach school zone and wig-wag. Solar panel bracket shall be mounted on top of pole. **All hardware shall be bolted to pole**

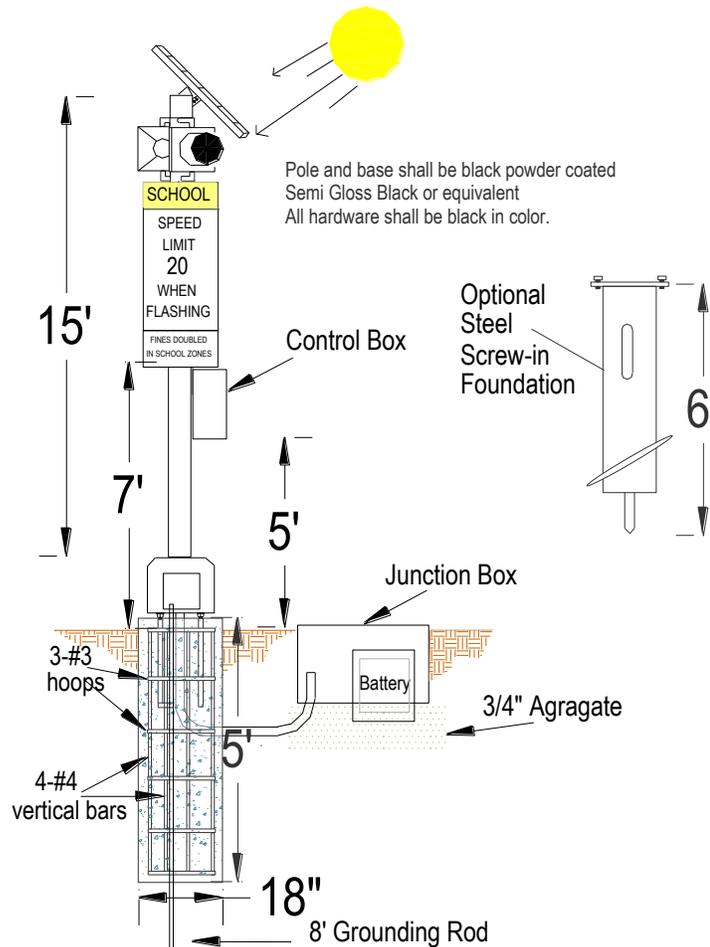


16.0 SCHOOL FLASHER FOUNDATION

Prior to pouring base:

- Tape conduit ends and oil bolt threads.
- Concrete shall be vibrated.
- Base surface shall be smooth finished with steel trowel and have a light broom finish.
- Mark conduit runs on top surface of base.

FLASHER FOUNDATION

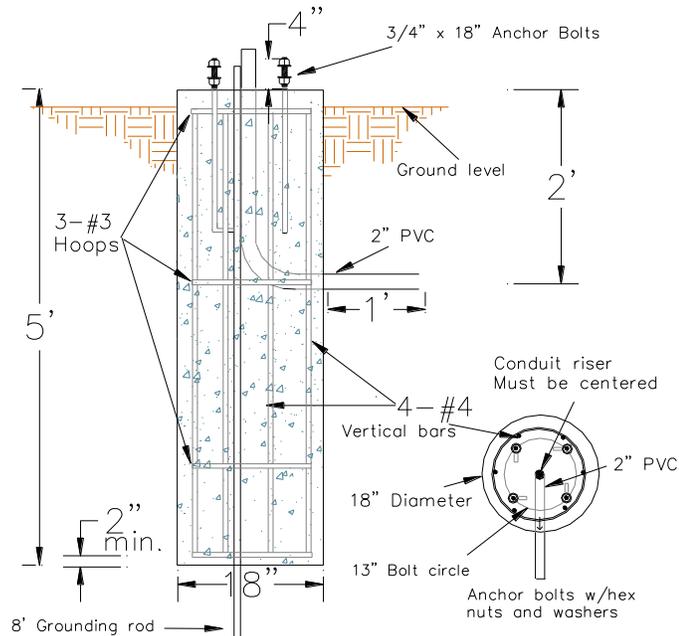

17.0 Power Meter Pedestal Specifications

17.1 Color to be standard gray.

17.2 Midwest #R101CP6HP or equivalent.

Procedure for power to an intersection:

1) Contact CSU electrical field engineer of the area to make sure of power source in the area.
Contact Anne Aldrich @ 719-668-8707

2) Obtain address from Regional Building, Flood Plain Division.

3) Call Traffic Signals at 719-385-6721 with address so account can be set up if new intersection.


4) Fill out load Data sheet and fax or mail to CSUtilities.

5) Obtain permit from Regional Building-to be done by contractor.



6) Call in for inspections: Done by contractor.

7) Regional will contact CSU, so that they can inspect the installation. To find out the status of the power, you can call 668-5524 with the address.

8) Complete process may take 2-3 weeks before a meter will be set after all inspections are passed.

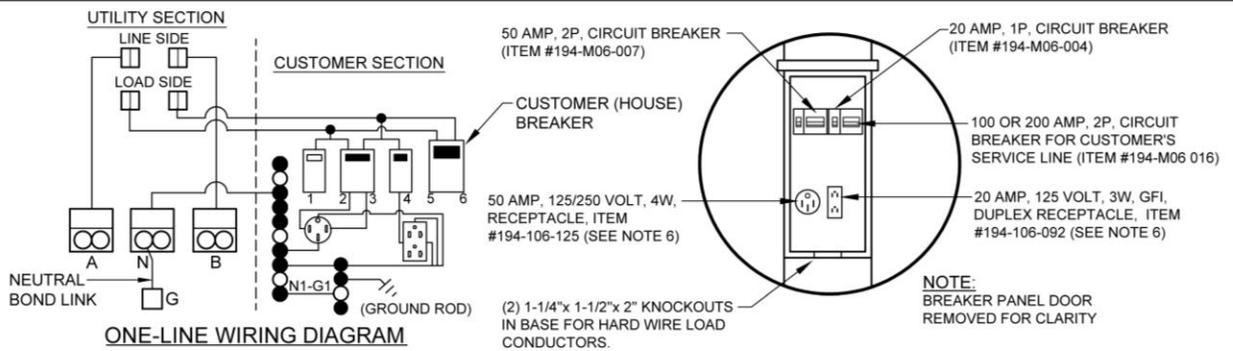

ONE-LINE WIRING DIAGRAM

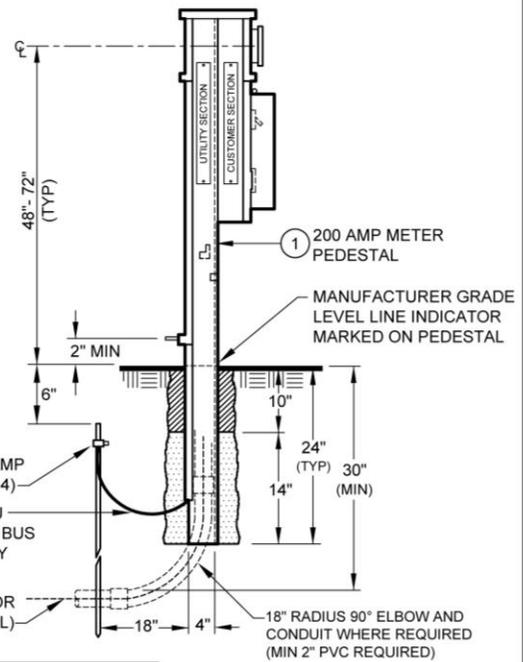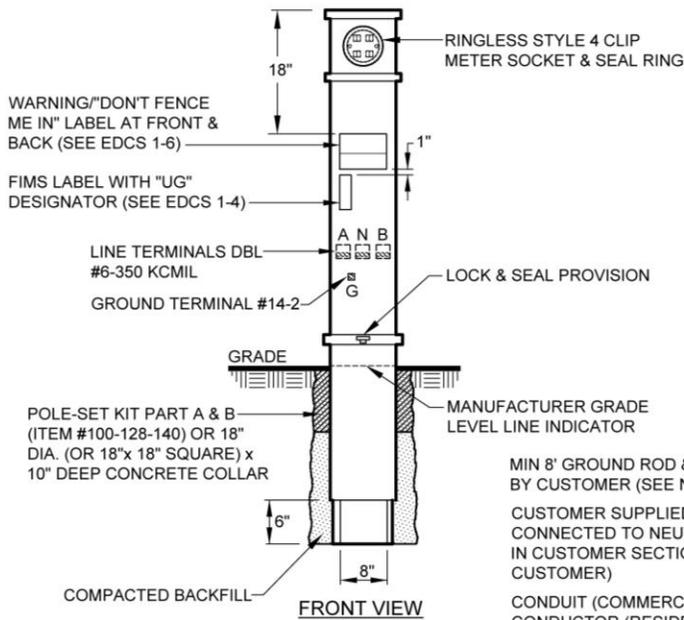

| CSU WAREHOUSE STOCKED REPLACEMENT PARTS | |
|---|-------------|
| DESCRIPTION | ITEM NO. |
| BREAKER, 100 AMP 2P | 194-M06-016 |
| BREAKER, 50 AMP 2P | 194-M06-007 |
| BREAKER, 20 AMP 1P | 194-M06-004 |
| RECEPTACLE, 125/250 VOLT 4W 50 A | 194-106-125 |
| RECEPTACLE, 125 VOLT, 3W 20 A GFI | 194-106-092 |
| SIGN, "DON'T FENCE ME IN", 5" x 5" | 100-130-471 |

RIGHT SIDE VIEW

CUID EXAMPLE:
E.PED

NOTES:

PERMANENT METER PEDESTAL

1. The pedestal (Item #194-113-406) must be placed outside of the service trench to ensure a solid footing. The earth must be thoroughly compacted around the pedestal to prevent tilting. Any tilting of more than 5 degrees will be straightened at the customer's expense.
2. To provide customer with better service, workmen must have access to both sides of the meter pedestal. Therefore, a 3'x 3' clear working and standing area shall be maintained in front and back of the meter pedestal.
3. A 48"- 50" typical height from top of finished grade to the centerline of the meter socket shall be maintained on all pedestals, (or buried to manufacturer provided grade level line indicator). The buried depth of the base shall be 24" typical below final grade. The bottom end of the utility termination cover shall extend 2" minimum above final grade.
4. A min 8" copper-clad bonded ground rod shall be driven below the ground line and within 18" of the side of the pedestal in a location that will avoid all conductors. The neutral will be bonded to the ground rod with a min #6 bare copper wire size as required by Regional Building Department (see Electric Line Extension & Service Standards Book, Drawing-9).
5. The customer's service line must not overlay the utility cable at any point.
6. Where customer load is hard-wired, receptacles are optional.
7. For trench information, refer to Electric Line Extension & Service Standards Book 7.02 (residential), or 10.1f (commercial).

ELECTRIC DISTRIBUTION CONSTRUCTION STANDARDS

APPROVED AS OF:
1-1-2012

PERMANENT PEDESTALS- MOBILE HOME METERING

8-5 PG. 1/1

T02-01626

Copyright © 2012 City of Colorado Springs on behalf of the Colorado Springs Utilities



18.0 SPECIFICATIONS FOR WIRE

- 18.1 **PPB-Paired Cable-Tray cable** shall comply with IMSA specification 19-1. Cable shall be minimum 6 conductors of 18 AWG. Cable shall be black PVC jacketed (.030 inches) overall with polyethylene insulation. Cable shall be shipped on sturdy wooden spools of 1,000 non-interrupted feet. Cable shall be equipped with a ripcord.
- 18.2 **Signal Cables;** shall comply with IMSA specification 19-1. Conductors are to be 14 AWG, comprised of no less than 7 strands and will be untinned. Conductor insulation shall be polyethylene. The cable jacket shall be of polyvinyl chloride only, and may not be unduly rigid. Tracer colors shall be painted onto the wire insulation but must be unremovable and a spiral design is preferred. Cable shall be shipped 1,000 non-interrupted feet on spools. Larger shall be approved by installer or signal supervisor. Spools shall be sturdy and constructed of wood. Spools shall be non-returnable. Cable shall be equipped with a ripcord.
- 18.3 **Camera Video Cable/ Camera Power Cable:** Composite, 6 conductors-2 elements; 16 AWG 5-conductors bare stranded copper (conductor colors shall be black, white, blue, red and brown), .016 polyethylene, 1 element equivalent to Belden 8281, video cable RG59/U-type with 2 braid shields and .030" PVC Jacket Black. This cable shall be suitable for installation in underground conduits or overhead with span wire applications. The coaxial cable, BNC connector and crimping tool shall be approved by Colorado Springs Traffic Engineering representative. Cable should be supplied on sturdy wooded reels in lengths of 1000' to 2500'. **Any video cable not supplied by City of Colorado Springs must be pre-approved before installation.**
- 18.4 **Power Cable;** From source to meter pedestal shall be a minimum #6 AWG THHN Stranded conductor or larger to meet voltage drop requirements.
- 18.5 **LED Streetlight wire;** the wire run down the pole from Cobra head to the street lighting pull box shall be #10-2/C min.
- 18.6 Equipment Grounding Conductor (EGC) Use at least 10 gauge, insulated, green, stranded copper. Refer to "City of Colorado Springs Traffic Signal Grounding Methods" manual
- 18.7 Ground pole using UFER ground technique.
- 18.7.1 Grounding Electrode conductor (GEC)- at least 4gauge, Bare, stranded copper.
- 18.7.2 Connect to rebar cage of concrete foundation using clamp suitable for submersion in concrete.

19.0 GALVANIZED STEEL CABLE

- 19.1 Cable is to be comprised of seven (7) strands of galvanized steel wire of gauge required to bring outside nominal diameter to specifications. Galvanizing must be class "A" (.9 oz. zinc per square foot) and each wire must be individually galvanized prior to cable assembly. Steel cable is to be Siemens-Martin Grade and minimum breaking strengths are to be:
3/16" 2,200 pounds
1/2" 12,100 pounds
- 19.2 Cable is to meet ASTM A475 Specifications. Cable shall be shipped on sturdy, non-returnable spools of 1,000 feet each; coils of wire not on spools shall be unacceptable.

20.0 TRAFFIC SIGNALS ACCESSORIES-

- 20.1 CONDUIT RUNNING THREAD-1 1/2" x 3' Galvanized steel conduit running thread (NPSM) used to space between top of signal head and 1/2" span wire. Finished product will be painted the same color as V-heads.
- 20.2 STRAND VISES-1/2" with long bale (Reliable #5254). To be used for 1/2", 7 strand galvanized steel cable.
- 20.3 3/16" with long bale (Reliable #5199). To be used for 3/16", 7 strand galvanized steel cable.
- 20.4 NOTE: Strand Vises to be attached to pole using 5/8 x 10" to 14" eye bolts two (2) each strand vises in each bolt eye. Thimble eye-bolt

21.0 CONDUIT OUTLET BODIES & ACCESSORIES

- 21.1 **STANDARD MATERIALS-** Mark 9 - Copper Free Aluminum, 3" Sand-Cast.
- 21.2 **STANDARD FINISHES-**Mark 9 - Aluminum Cellulose Lacquer
- 21.3 **BLANK COVERS-**To be sheet steel for Mark 9 conduit outlet bodies.
- 21.4 **GASKETS-**Neoprene
- 21.5 **SERVICE ENTRANCE FITTINGS (WEATHER HEADS-**Fittings shall have a clamp type cap to fit rigid conduit of specified sizes. Preferably hot dip galvanized.

22.0 TRAFFIC SIGNAL HEADS – VEHICLE (ETL Certified LED's)

- 22.1 The housing shall be aluminum alloy and shall be of sectional construction to permit the installation of additional sections for future needs. The tops and bottoms of signal sections shall be flat for interchangeability and have a 2-inch diameter mounting hole. Each section should have a weep hole for drainage of moisture.
- 22.2 The door shall be die cast aluminum alloy, which shall be hinged at the left side with a substantial screw type fastener of stainless steel at the right side. The visor shall be of aluminum.
- 22.3 The door shall be gasketed to exclude dust and moisture.
- 22.4 Signal head and visors shall be powder coated. Color determined when ordered.
- 22.5 All gaskets shall be neoprene.
- 22.6 All signals shall have the terminal blocks in bottom half of red section with one common neutral.
- 22.7 All mast arm installations will have backplates on each signal head.
- 22.8 All signals to be packaged one (1) per carton.
- 22.9 Traffic signal heads shall conform to the Manual on Uniform Traffic Control Devices.
- 22.10 Visors shall be tunnel type, open at bottom and inside shall be dull black finish per MUTCD.
- 22.11 12" visors shall be 9 to 10 inches in length.

23.0 Expanded View LED modules. (ETL certification is required)

- 23.1 **All LED BALL signal modules (8 inch and 12 inch)** shall be fully compliant to the ITE VTCSH LED Circular Supplement specifications dated and adopted June 27, 2005 or the latest adopted version as listed on the ITE website at time of bid. Compliance to the ITE VTCSH-2 Interim Purchase Specification is not sufficient, and will not substitute for compliance to the ITE VTCSH LED Circular Supplement specifications. Evidence of full compliance is required.
- 23.2 **All LED 12 inch Arrow Signal Modules** shall be fully compliant to the omnidirectional specifications of the ITE VTCSH - LED Vehicle Arrow Traffic Signal Supplement adopted July 1, 2007.
- 23.3 **All LED Pedestrian Signal Modules** shall be fully compliant to the ITE PTCSI Part-2: LED Pedestrian Traffic Signal Modules specifications Version September 30, 2004, Adopted March 2004 or the latest adopted version as listed on the ITE website at time of bid.


- 23.4 In addition to, and in excess of the applicable ITE specification compliance, the on-board circuitry of all LED traffic signal modules shall include voltage surge protection, to withstand high-repetition noise transients and low-repetition high-energy transients as stated in Section 2.1.8, NEMA Standard TS 2-2003. In addition, the module shall comply with the following standards: IEC 1000-4-5 at 3kV with a 2 ohm source impedance, ANSI/IEEE C62, 41-2002; IEC 61000-4-12 (6kV, 200A, 100kHz ring wave).
- 23.5 All LED traffic signal modules shall meet (Fcc Title 47, Subpart B, Section 15 regulations for electrical noise).
- 23.6 All LED traffic signal modules shall conform to (MIL-STD-810F for blowing rain).
- 23.7 All LED traffic signal modules shall conform to (MIL-STD-883 test method 2007, for mechanical vibration).
- 23.8 All LED traffic signal modules shall conform to (MIL-STD-883 Test method 1010, Temperature cycling requirements).
- 23.9 The manufacturer must submit a data sheet showing the exact catalog numbers of the items submitted on the bid.
- 23.10 Warranty-Manufacturer shall provide at time of bid, a written warranty which provides for repair or replacement of modules that fail to function as intended due to workmanship or material defects within the first 60 months from date of delivery. Modules which exhibit luminous intensities less than the minimum as specified in the ITE specifications as indicated above, within the first 60 months from date of delivery shall be replaced or repaired by the manufacturer.
- 23.11 **Enclosure**; Shall be dust and water-resistant.
- 23.12 **Voltage**; Operating shall be between 80VAC and 135 VAC. Electronic circuitry shall assure proper operation of the load switch and monitor in the cabinet.
- 23.13 Maximum total harmonics current distortion (THD) shall be < 20%.
- 23.14 **Operating Temperature**; Between -40 degrees C and +74 degrees C.
- 23.15 **Lens**: Shall be replaceable, polycarbonate (UV stabilized "Lexan") convex lens; meet ITE color standards; minimum of 1/8 " thickness; and minimum light transmittance of 92%, free from bubbles, flaws and other imperfections. Non-polycarbonate red tinted lenses will be accepted provided that these meet ITE color standards. Chromacity shall be measured uniform across the face of the lens. Non-polycarbonate lenses shall also meet 3-1/2 foot tests.

24.0 PEDESTRIAN SIGNALS (Countdown only)

- 24.1 **GENERAL-** Construction design shall be compatible with clamshell mounting hardware. The general construction shall include a single piece cast aluminum housing, a single piece cast aluminum swing down door frame, **no Z-crate, a cut-away sun visor**, side-by-side incandescent look LED indications and other hardware.
- Optically, the subject pedestrian signal shall be capable of displaying, brightly and uniformly, the alternate message symbols "HAND" in Portland orange and "WALKING PERSON" in white while being subject to strong ambient light conditions, the messages shall "Blankout" when the signal is not energized.
- In order to facilitate installation and maintenance, the signal shall be designed so that all components are readily accessible from the front by merely opening the signal door.
- 24.2 **DIMENSIONS-**The maximum overall dimension of the signal shall be 18 1/8 inches wide, 18 3/4 inches high, and 9 inches deep and hinges. The distance between the mounting surfaces of the upper (non-shurlock) and the lower (shurlock) openings shall be 15 3/4 inches.
- 24.3 **OPTICAL SYSTEM-** The optical system shall consist of side-by-side LED indications with the incandescent look.
- 24.4 **All LED Pedestrian Signal Modules** shall be fully compliant to the ITE PTCSI Part-2: LED Pedestrian Traffic Signal Modules specifications.
- 24.5 A one-piece sponge neoprene gasket fitted around the perimeter such that a weatherproof seal is afforded whenever the reflector, lens, door, and case are properly mated.
- 24.6 **Housing-** The housing shall be a one-piece corrosion resistant aluminum alloy die-casting complete with integrally cast top, bottom, sides and back. The housing shall be dust proof, weatherproof and corrosion resistant. Four integrally cast hinge lug pairs, two at top and two at the bottom of each case, shall be provided for operation of a swing down door.
- 24.7 **Cut away sun visor-** Each pedestrian signal shall have a sun visor mounted to the metal door frame. Visor shall extend approximately 7" out from the head.
- 24.8 **Door Frame-** The door frame shall be a one piece corrosion resistant aluminum alloy die casting, complete with two hinge lugs cast at the bottom and two latch slots cast at the top of each door. The door shall be attached to the case by means of two Type 304 stainless steel spring pins. Two stainless steel hinged bolts with captive stainless steel wingnuts and washers shall be attached to the top of the case with the use of stainless steel spring pins. Hence, latching or unlatching of the door shall require no tools.
- 24.9 **30 DEGREE ADJUSTMENT-**The bolthole shall be elongated from side to side and the recessed shoulder shall be curved to allow rotation of the installed assembly 15 degrees in either direction from center for a total of 30 degrees (when installed on a 4-inch pole).


PEDESTRIAN SIGNALS continued

- 24.10 **CLAMSHELL MOUNTING HARDWARE**-Mounting hardware shall match the style of clamshell shown in section 24.17 “Clamshell Mounting Hardware”. Clamshell shall be delivered assembled on left or right side of unit.
- 24.11 **CONSTRUCTION**-The subject mounting hardware shall be a two piece, cast aluminum alloy assembly. The two separate castings shall be joined in the final assembly by the use of stainless steel spring pins. The spring pins shall be factory installed into the hinge ears that shall be integrally cast into the “pole half” of the assembly. Final mating of the two halves shall be accomplished by inserting the spring pins into the drilled hinge ears of the head half of the assembly (loose fit).
- 24.12 **APPLICABLE INSTALLATIONS**- The pole half of the assembly shall be designed to adapt to a wide range of pole configurations (4-inch minimum diameter). The pole-mating surface shall be configured much like terminal compartments used for conventional bracket mounting.
- 24.13 **ADAPTABLE MOUNTING**- Unit construction shall allow for through-bolt, bolt to tapped pole, lag screw, and band-it type mounting. Through-bolt mounting shall accept two ½ inch diameter hex head bolts located on 9 inch centers. A channel with a recessed shoulder shall be included to retain the bolt head (or nut) and thus prevent rotation. Clearance shall be provided on the mating half of the assembly such that the bolt can extend through the nut when it is desired to bury the nut and bolt end inside rather than bury the bolt head inside. **(Ped heads shall be mounted to the signal pole with bolts).**
- 24.14 **Installation**-Units shall be installed on the back side of signal poles unless approved by traffic Engineering to mount differently.
- 24.15 **Powder coat Painting**-Prior to final assembly, the case, door frame and the mounting hardware shall be powder coated to specified color.
- 24.16 **WARRANTY**-The entire pedestrian signal (including message lens, case, door frame and the clamshell mounting hardware) shall be warranted for two years from the date of original shipment against defects in workmanship and/or materials.
- 24.17 **CLAMSHELL MOUNTING HARDWARE**

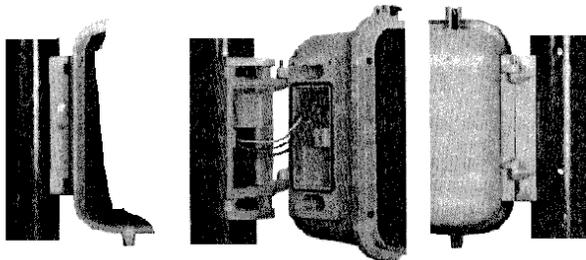

25.0 Break-away tether assembly

- 25.1 Consists of cast aluminum threaded assembly to fit bottom of signal head. Assembly unit shall have single stud for tightening.




26.0 ENTRANCE FITTING/SIGNAL HEAD HANGERS

- 26.1 Entrance fitting is a casting that couples to signal head to lower end and has a drilled rib at top to connect to cable suspension clamp. Rib is to have a series of holes beginning at centerline of signal head connector to allow for correct positioning of off-balance signal head assemblies. Pinholes are to be designed for 5/8" pin. Rib shall not be more than .625 in thickness. Integral path for wire shall be free of sharp edges and constrictions and shall have a plastic bushing at its head. Threads in entrance fitting shall also be 1 1/2" NPSM. Fitting shall have 5/16" NC set screw inside to prevent chase nipple loosening. Bottom of entrance fitting shall either bear serration's for standard 72 position signal grip or shall be equipped with locking washer bearing standard 72 position signal grip. **Shurlock rings shall be constructed out of metal or aluminum. Plastic shurlock rings shall not be used.** Chase nipple shall be grooved and shall include O-Ring to seal signal head. Both entrance fitting and chase nipple shall be malleable iron and shall be painted **gloss black**.


27.0 SPECIFICATIONS FOR SUSPENSION CLAMPS

- 27.1 Suspension clamps must be at least 7 inches long and is to be of malleable iron. Clamp and pin shall be galvanized (Class "A", .9 oz. zinc per square foot). Hole drilled in tangs for pin shall be 5/8" and 5/8" pin shall be supplied. Width between tangs shall be .70" +/- .025". Clamp bolts shall be "U" bolts with four (4) nuts and washers. "U" bolts, nuts, and lock washers shall be cadmium plated. 5/8" pin shall be drilled for minimum 1/8" diameter cotter pin, which shall be, supplied cadmium plated. Minimum ultimate strength shall be 16,000 pounds. Clamp is to be usable on either 3/8" or 1/2" stranded steel cable. Entrance fittings shall accept City of Colorado Springs standard all thread stock.

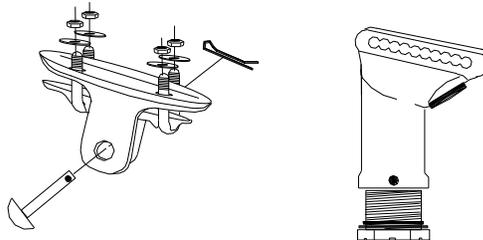

28.0 UPPER ARM ASSEMBLY

- 28.1 Upper Arm Assembly must be used to mount five section left turn heads in a span wire configuration. This unit shall be universal to all signal heads with a 1 1/2" serrate for Standard 72 position signal grip. Grip is to be compatible with Eagle Brand Signal Heads. Unit shall be complete as shown. Unit shall be metal and painted to specified color. **Upper arm assembly shall not be constructed of 1 1/2" conduits with set screws.**

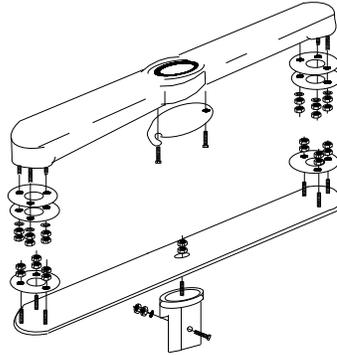


29.0 SINGLE HEAD-Side of pole Mounts

- 29.1 This bracket consists of a 1 1/2" pipe nipple with an elbow at its end and a nipple and nut to retain the signal head. The pipe nipples are to be 1 1/2" cast aluminum with 1 1/2" NPSM threads. The nuts are to be hexagonal, 2 9/16" across the flats, threaded 1 1/2" NPSM, and shall be constructed of cast aluminum. One nut shall be supplied for each nipple of the bracket. Conduit lock rings or nuts or chase nipples requiring special tools are not acceptable. The minimum overall length of the arm should be 12" c/c including hub. The elbows shall be cast aluminum, threaded 1 1/2" NPSM and will have set screws to lock in place. The elbows shall be cast with serration's to position the head, or washers with serration's are to be supplied. Serrations are to be compatible with 72-position serrations on Eagle Brand signal heads. Brackets are to be shipped assembled and are to be painted. Each pair of brackets is considered a unit, as it requires two (2) for each mounting.


30.0 POLE MOUNT FITTINGS (BANDIT BRACKETS-Hub Plate)

- 30.1 Fittings to be cast aluminum, painted **gloss black**, with guides for 1" or 3/4" steel bands. Radius of standard bracket to accommodate large diameter poles. Single threaded hub to be 1 1/2" NPSM, threaded completely through. Guides shall be drilled with a 1/2" hole for mounting the bandit bracket with 3/8" bolts.



31.0 Mast Arm Mounting Bracket Assembly

- 31.1 Astro-Brac (PELCO-AB-0617-3-96-PNC), one-way bracket assembly with clamp kit (Cable mount) and variable bracket assembly with clamp kit (cable mount). Cable shall be minimum 84" in length.

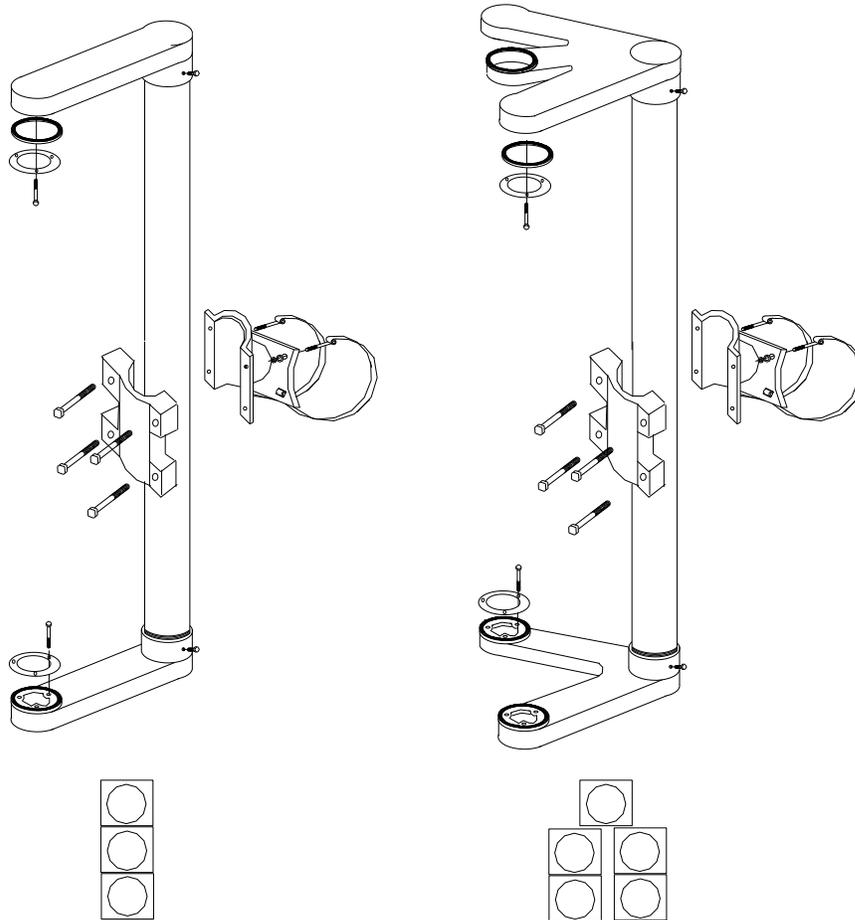

31.2 General: One-way Bracket Assembly

- Standard Band Bracket Assembly
- Arm Kit, standard 9"
- Clamp kit, cable mount.
- Gusseted Tube w/ Vinyl insert
- No U-bolts used to clamp gusset tube.


31.3 General: Variable Bracket Assembly,

- 5-Sec. Cluster Assembly, band mount
- Arm Kit, 5-section cluster
- Clamp Kit, Cable mount
- Gusseted Tube w/ Vinyl insert

32.0 PEDESTRIAN PUSHBUTTONS

32.1 The pedestrian pushbutton shall be shockproof, waterproof, freeze proof and ADA compliant in design. Stainless steel button shall be pressure activated but withstand a hard impact. **Pushbuttons shall utilize Piezo driven solid state switch.** Standard 2” deep housing shall be used. Special purpose pushbuttons may be ordered on specific projects. See examples below.

32.2

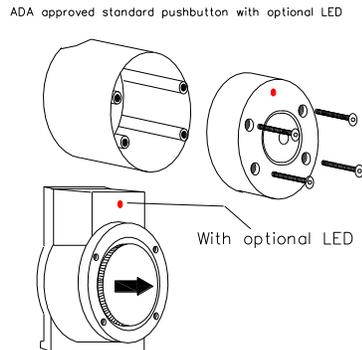

32.3 **ADA round compliant pushbuttons may be as follows:**

32.3.1 **Body Material:** Round Aluminum, Powder coated gloss black. Retrofits existing housings, compatible with Automatic/Eagle, G.T.E., Pelco, Traffic Signal Hardware and others.

32.3.2 **Actuator Button material:** Large, 2-inch, Stainless steel button pressure activated.

32.3.3 **Piezo Driven Solid State Switch:** Cannot be made to stick on.

Operating Temperature: -30°F to +165°F.

Operating Voltage: 15-36VDC or 12-28VAC.

Switching Current: 10 micro amps.

Operating Life: Greater than 100 million operations.

32.3.4 **LED:** Color, Ultra Bright Red (Easily seen in daylight).

Luminous Intensity: > 1200 mcd

Optimum Viewing Angle: 160°


Momentary: LED provides approximately 0.1-sec flash each time button is pressed. Uses power from existing wires. Works with 12-24 VDC.

32.3.5 **Beeper:** Different tones for press and release – 2.3 kHz & 2.6 kHz.

33.0 JUNCTION OR PULLBOXES

- 33.1 The standard size pull boxes shall be approximately 30” long x 17” wide x 18” depth and be constructed of reinforced fiber or gray polymer concrete and reinforced by a heavy weave fiberglass. A large size pull box shall be approximately 36” long x 24” wide x 18” depth is typically used next to the controller cabinet that utilize underground conduit runs to feed mast arm configuration. A small size approximately 24” long x 13” wide x 18” depth may also be utilized in special applications.
- 33.2 Shall comply with Western Underground Committee (W.U.C.) Guide 3.6
- 33.3 Lids shall have Coefficient of Friction (ASTM C1028) >0.5 on the surface.
- 33.4 Removable bolt down lid shall be imprinted “TRAFFIC” and shall be secured with stainless steel hex-head bolts with washer. Drain holes shall be provided in bolt holes for easy removal of debris.
- 33.5 Applications are intended to be placed in residential sidewalks, roadway medians and behind curbs where no deliberate vehicular traffic is planned.
- 33.6 Lid loading shall be compliant with ATSM C857 (AASHTO) SCTE Tier 15.
- 33.7 Tier 15 Standards-
- | | | |
|----------|----------------------|------------------|
| 33.7.1.1 | Vertical Load Rating | 15,000 lbs |
| 33.7.1.2 | Vertical Test Load | 22,500 lbs |
| 33.7.1.3 | Lateral Load Rating | 800 lbs/sq.ft. |
| 33.7.1.4 | Lateral Test Rating | 1,200 lbs/sq.ft. |
- 33.8 Tier 22 Standard
- | | | |
|----------|----------------------|----------------|
| 33.8.1.1 | Vertical Load Rating | 22,500 lbs |
| 33.8.1.2 | Vertical Test Load | 33,750 lbs |
| 33.8.1.3 | Lateral Load Rating | 800 lbs/sq.ft |
| 33.8.1.4 | Lateral Test Rating | 1200 lbs/sq.ft |

34.0 ROCK FIBER CONTROLLER BASE. (Used with CS332 cabinets)

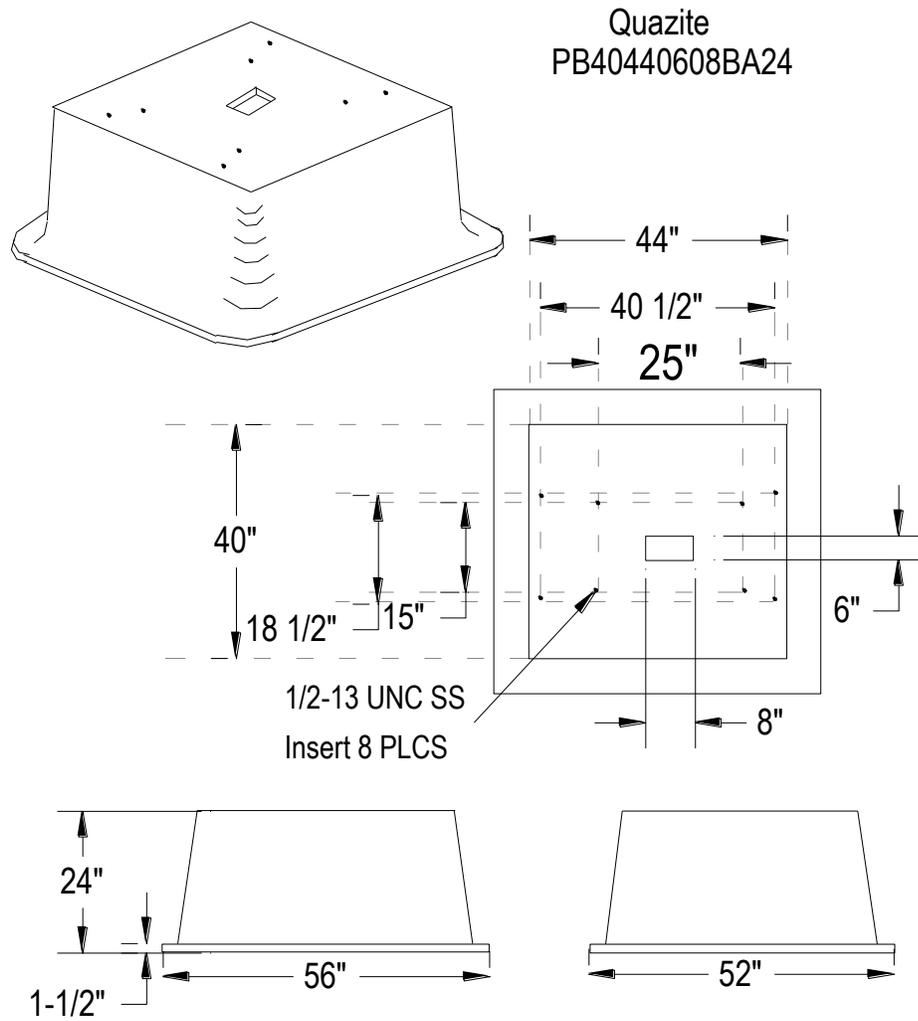

34.1 General:

- Description: Quazite PB4044BA24 or equivalent.
- Unit of Measure: Each
- Use: Traffic Signal controller foundation base

34.2 Material-Open bottom gray polymer concrete and reinforced by a heavy weave fiberglass

34.3 INSTALLATION: Base shall be level on a bed of crushed gravel (4" min depth) and should extend out of the ground 12". Check with Area Field Tech to field fit for elevation and orientation. Underground conduits shall remain 6" to 8" below the hole at the top of base.

34.4 Installation shall have a concrete pad in front and rear of cabinet which shall be the same with as the controller rock fiber base.

This Page Left Blank

35.0 Controller/Cabinet Specs:

330S C/S Cabinet System.

35.1 Base mount cabinet

- **330S CS** Natural alum cabinet system to include the following:
- 1-332S cabinet shell w/o police door
- **1-330S rack assembly** (wired to Colo Spgs spec.)
- 1-Drop down shelf on front door
- 1-Fan panel assembly
- 2-corbin door locks
- 1-Red Monitoring Assembly
- 1-Flash Sence Modification
- 1-206L power supply.
- 1- Auxilliary power panel w/GFI receptical and added bus bars
- 1-RENO 2018 conflict monitor (WI-R-US/16)
- 7-FTR's
- 2-model 204 Flasher (PDC)
- 12-model 200 loadswitches (PDC)
- 2-242 DC Isolators (PDC)
- 1-ISM Controller (Supplied by City of Colorado Springs)

35.2 Pole Mount Cabinets:

- **330S CS** Natural alum cabinet system to include the following:
- 1-330S cabinet shell w/o police door
- 1-330S rack assembly (wired to Colo Spgs spec.)
- 1-Fan panel assembly
- 1-corbin door locks
- 1-Red Monitoring Assembly
- 1-Flash Sence Modification
- 1-215 bypass cable
- 1-RENO 2018 conflict monitor (WI-R-US/16)
- 7-FTR's
- 2-model 204 Flasher (PDC)
- 12-model 200 loadswitches (PDC)
- 2-242 DC Isolators (PDC)
- 1-ISM Controller (Supplied by City of Colorado Springs)
-

35.3 Colorado Springs Specs = Flush Mount Handles and NO Police panel access. Contact Traffic signals shop for conformation on which cabinet will be used on each project.

35.4 Profile of SAFETRAN 330S C/S Cabinet System

Rack components supplied to the City of Colorado Springs shall be assembled like the picture below. All components shall be consistent and interchangeable with existing cabinets in the field to maintain consistency throughout the City. Controller unit is proprietary ISM controller developed by City of Colorado Springs.



35.5 Controller Communications

Proprietary Radio pack & Antenna (Purchased from City of Colorado Springs)

36.0 VIDEO IMAGE PROCESSING SYSTEM (Traficon)

- 36.1 **INTENT:** The intent of the following specifications is to describe the minimum requirements for providing a complete Video Detection System. Initially, the system shall be capable of providing presence vehicle detection at intersections. The video system shall be expandable without removing or replacing existing units.
- 36.2 **OVERVIEW:** Acceptable systems include that of any manufacturer whose system has successfully passed a 120 day City of Colorado Springs Traffic Engineering (CSTE) field test, provided such equipment meets all qualifying specifications identified herein. Using standard image sensor optics and in the absence of occlusion, the system shall be able to detect vehicle presence with 98% accuracy under normal conditions (day and nights), and 96% accuracy under adverse conditions (fog, rain, snow).

All items and materials furnished shall be new, unused, current production models installed and operational in a user environment and shall be items currently in distribution. The product algorithms shall have a proven record of field use at other installations for at least (3) years of service i.e., not including prototype field trials prior to installation.

36.3 GENERAL:

- 36.3.1 **Video Vehicle Detection System-**These technical specifications describe the minimum physical and functional properties of a video detection system. The system shall be capable of monitoring all licensed vehicles on the roadway, providing video detection for areas outlined in the construction drawings. The video detection system shall consist of the following:

- Video Image Processing Unit(s)
- Video camera(s) with IR filter, enclosure and sunshield
- Camera Lens
- Surge suppresser
- Power/Video Cable
- All other necessary equipment for operation

37.4 Hardware:

- The **Video Image Processor (VIP)** shall be the most current version used by City of Colorado Springs. VIP shall be modular by design and fit directly into Type 170/179 input files. The VIP shall be interchangeable without replacing or modifying existing VIP units.
- The system shall control from 1 to 4 VIP boards allowing for 1 to 8 camera inputs.
- The system shall be designed to operate reliably in the adverse environment of roadside cabinets and shall meet or exceed all NEMA TS1 and TS2, as well as Type 170/179 environmental specifications.
- Ambient operating temperature shall be from -35 to +75 degrees Centigrade at 0 to 95% relative humidity non-condensing.

- The system shall be powered by 12-40 VDC and draw less than 2 amperes.
- The system shall utilize cabinet 24 VDC for rack mount installations or external 24 VDC for stand-alone shelf installations.
- Surge ratings shall be set forth in the NEMA TS1 and TS2 specifications.
- Serial communications shall be through an RS232 serial port. This port can be used for communications to a modem or laptop to upload/download detector configurations, count data and software upgrades. RS485 on the rear edge connector shall facilitate communications to other VIP boards.
- Each VIP board shall have 4 opto-isolated open collector outputs. Twenty (20) additional outputs shall be available via the expansion port. The outputs shall be programmed for signaling the presence, the arrival or the departure of vehicles in a minimum of 48 detection zones.
- Each VIP board shall allow for 20 digital inputs via the I/O Expansion port.
- 37.4.11 Each VIP board shall have error detection. An output contact will open if the video signal is bad or the VIP board is not functioning properly. A user defined quality level will automatically put the VIP into a recall state in cases of severe degraded visibility (i.e., fog, blizzard, etc.). Normal detection resumes when visibility improves above the user defined quality level. Levels can be modified with a simple keyboard as well as time parameters for recall and normal operation.
- Operator selectable recall shall be available via the VIP front panel.
- A video select button on the VIP front panel will switch between camera images of the VIP.
- The VIP board shall have 2 video inputs (RS-170 NTSC or CCIR composite video) and one video out.
- The VIP board shall have a reset button on the front panel to reset video detectors to “learn” the roadway image.
- External surge suppression, independent of the VIP board shall separate the VIP from the image sensor.
- The VIP board shall have separate light emitting diodes (LEDs) that indicate:
 - **POWER** Red to verify power supply.
 - **I/O COMM** Red to indicate communications to expansion boards.
 - **VIDEO 1 & 2** Red to verify the presence of video input 75 Ohm.
 - **TX & RX** Red to indicate communications via the serial port.
 - **OUT1- OUT4** Green if the corresponding detection group is active.

The VIP board shall also have 2 separate buttons for:

- **RECALL** Manually places call on detectors.
- **RESET** Manually reset detectors to “learn” new background.

37.5 VIDEO SELECT

- The VIP board shall also have a video out female RCA style connector, DB9 female Service port and DB9 I/O Expansion port.
- The VIP Expansion board shall also have separate LEDs that indicate:
 - **POWER** Red to verify power supply.
 - **COMM** Red to indicate communications to VIP board.
 - **I/O1- I/O4** Green if the corresponding detection group is active.
 - The VIP Expansion board shall have 8 dip switches that define inputs and outputs used (range: 1-12 or 13-24).

37.6 Functional Capabilities

- Real Time Detection
- 3D.2-VIP board shall be capable of processing the video signal of 2 cameras. The video signal shall be analyzed in real time (30 times per second).
- The system shall be expandable up to 8 cameras that may be connected to different VIP units and programmed independently.
- The system shall be capable of displaying detectors on the video image with associated outputs. Outputs/Inputs status will be indicated on the screen. Parameters will also include the ability to view raw video without any verbiage and/or detectors for surveillance purposes.
- Each VIP board will detect within the view of the connected camera the presence of vehicles in user defined zones. Detectors available shall be presence, count, delay, extension, or pulse mode of either arrival or departure of vehicles. Delay and extension shall be defined between .1 - 99 seconds and pulse mode between 20ms-100ms in 20ms increments.
- The VIP board shall be programmed without the use of a supervisor computer. A standard CCTV monitors and keypad plugged into the VIP serial port will facilitate detector programming.
- The VIP board shall store up to 8 detector configurations (4 per video input). It shall be possible to switch between detector configurations manually or automatically by time of day or input from the traffic controller.
- Via the serial port, detector configurations can be uploaded or downloaded with a laptop computer and stored on disk.

- Detectors may be linked to 24 outputs and 20 inputs using Boolean Logic features: AND, OR, NOT. It will be possible to generate conditional outputs based upon inputs from a controller.
- It shall be possible to make a detector directional sensitive. Options will include an omni-directional detector or a detector that only senses movement: from right to left, left to right, up to down or down to up as you look at the monitor.
- To facilitate “fine tuning” of detection zones a maximum of 10 lines and a minimum of 4 lines may be adjusted within the confines of the detector.

37.7 Functional Capabilities continued

- All detectors and parameters can be changed without interrupting detection. For example: when one detector is modified all existing detectors continue to operate, including the one that is being modified. When the new position is confirmed, the new detector will enter a learning phase. Once the new detector is in function it will take over the job of the old one. In this way, the detector is always fully operational with no interruption on any detector, even during modification. Learning phases for new detectors shall not exceed 10 seconds.
- Six detectors per input may be used as count detectors. Count detectors will detect and store count data at user-defined intervals of .5, 1, 5, 10, 15, 30 & 60 minutes. It shall be possible for each VIP board to store up to 4000 intervals of count data in non-volatile memory.
- Associated software may be used with a PC to download count data and export to a spreadsheet. Software will also be used to upload/download detector configurations and update software versions of the VIP board.

37.8 IMAGE SENSOR- CAMERA (Rainbow BL58DF CCD)

- The unit shall be a high resolution, 1/3” image format CCD camera, designed for professional video surveillance systems. Incorporating the latest in CCD technology, the video camera shall provide detailed video without lag, image retention, or geometric distortion.
- Temperature range -10 to + 50 degrees C
- Humidity 0% to 95% relative, non-condensing
- Dimensions 83mm X 47mm X 47mm
- Weight 7.1-oz (200g.)
- Camera mounting slots 1/4-20, top and bottom
- Connectors BNC for video out
- Lens mount CS
Power-in / pressure screw
Lens / 6-pin miniature “DIN” style
- Finish Off-white semi-gloss polyurethane
- Construction All metal housing
- Rated input voltage 24 VAC, 60 Hertz
- Voltage range 21 to 30 VAC
- Nominal power 6 Watts

- Imager Interline transfer CCD 1/3" format
- Imager spectral response 100% @ 550nm:
30% @ 400nm and 800nm
- Sync system EIA RS-170
- Active picture elements 768 H X 494 V
- Horizontal resolution 580 TVL

- Sensitivity (2856 K)

| | | Usable Picture | Full Video |
|---------------------|----|---------------------------|-----------------------|
| Scene Illumination | fc | 0.012 | 0.08 |
| | lx | 0.12 | 0.8 |
| Imager Illumination | fc | 0.0015 | 0.01 |
| | Lx | 0.015 | 0.1 |

* F1.2 lens @ 75% highlight
- Signal to noise ratio More than 48dB 58 dB typical
- AGC 30 dB
- Light range (AGC on) 1,000,000:1 min. with f/1.4 to 360 auto-iris lens
- Video out 1.0 volts peak-to-peak +/- 0.1 volt @ 75 Ohms
- Gray scale At least 10 steps

37.9 **CAMERA- LENS:** Standard (Power Focus & Zoom)
Wide-Angle Option(Manual Focus & Zoom)

37.9.1 CAMERA LENS – Standard View Power Zoom:

The camera lens shall be a Vari-Focal 6.5mm – 39mm. The lens shall use (2) two aspherical lenses for high-quality optics. The unit design shall be compacted utilizing a DC-iris, focus and zoom control.

- Image format 1/3 inch
- Focal length 6.5 - 39mm
- Iris f/1.0
- Focusing range 1.8m to Infinity
- Back focus Length 9.25mm
- Weight 410g.
- Lens mount CS
- Angle of view 7 - 41 degrees
- Iris control 6 Pin DC control, Auto
- Focus control Motorized
- Zoom control Motorized

37.9.2 CAMERA LENS – Wide-Angle Manual Zoom:

The camera lens shall be a Vari-Focal 2.8mm – 6.4mm. The lens shall use (2) two aspherical lenses for high-quality optics. The unit design shall be compacted utilizing a DC-iris and manual focus and zoom control.

- Image format 1/3 inch
- Focal length 2.8 – 6.4mm
- Iris f/1.0
- Focusing range 1m(3.3 ft.) to Infinity
- Back focus Length 10.05mm (0.4in.) in air
- Weight 97g. (0.213lb.)

- Lens mount CS
- Angle of view 41 – 89 degrees
- Iris control 6 pin DC control, Auto
- Focus control Manual
- Zoom Manual

37.10 IMAGE SENSOR- HOUSING

- The environmental housing shall be an aluminum enclosure designed for outdoor CCD camera installations.
- Temperature range -40 to +50 degrees C
- Dimensions 449mm x 97mm x 112mm
- Weight 1.4kg
- Housing mounting Three 1/4-20 tapped holes
- Camera mounting Removable cradle assembly
- Cable entry Three liquid-tight fittings that accept cable diameters of:
One fitting - 2 to 7 mm
Two fittings - 3 to 10 mm
- Finish Off-white semi-gloss polyurethane
- Construction Extruded aluminum housing, Aluminum rear-end cap, Aluminum front cap with glass face plate, and aluminum cradle. (A sunshield shall be included)
- Window 3 mm thick glass that includes a thermostatically-controlled window and Heater/defogger strip
- Rated input voltage 115 VAC 60 Hertz
- Voltage range 108 VAC to 132 VAC
- Output voltage 24 VAC 60 Hertz
- Nominal power 30 Watts
- Enclosure protection Waterproof and dust-tight in a NEMA-4, IP65, enclosure Type 3

37.11 SURGE PROTECTION

- A video surge suppressor(s) shall be included with each camera, installed inside the traffic signal controller cabinet and properly grounded. The suppressor shall provide coaxial cable connection points to an EDCO CX06-BNCY or approved equal transient suppresser for each image sensor.
- Peak Surge Current (8 x 20 us) 5KA
- Technology Hybrid, Solid State
- Attenuation 0.1db @ 10Mhz
- Response Time <1 nanosecond
- Protection Line to Ground
- Shield to Ground (isolated shield modules)
- Clamp Voltage 6 volts
- Connectors BNC
- Impedance 75 Ohms
- Temperature -40 to +85 degrees C
- Humidity 0-95% non-condensing
- Dimensions 4.5" x 1.5" x 1.25"
- UL Listed UL 497B

37.12 Camera Cable / Power Cable:

- Composite, 6 conductors-2 elements; 16 AWG 5-conductors bare stranded copper (conductor colors shall be black, white, blue, red and brown), .016 polyethylene, 1 element equivalent to Belden 8281 with .030" PVC Jacket Black. This cable shall be suitable for installation in underground conduits or overhead with span wire applications. The coaxial cable, BNC connector and crimping tool shall be approved by Colorado Springs Traffic Engineering representative. Cable should be supplied on sturdy wooded reels in lengths of 1000' to 2500' maximum. **Any video cable not supplied by City of Colorado Springs Shall be pre-approved before installation.**

37.13 INSTALLATION (The contractor should obtain a copy of the appropriate standards & specifications). The following special conditions apply:

37.14 General Construction Notes:

- The City of Colorado Springs Traffic Signals Division reserves the right to bill contractor for any materials and/or labor needed to repair and/or replacement any faulty work or craftsmanship during the warranty period.
- All installation work shall be under the direct supervision of IMSA level II or higher certified leadworker.
- Power / Video cable shall be continuous from the controller cabinet to the video camera. Coaxial cable will be terminated at the surge suppressor before being connected directly to controller backboard. Power cable will be terminated into a fuse panel mounted at the PDA and connected to AUX 120 VAC+ on controller backboard. No splicing of video camera cable will be allowed. BNC plug connectors should be used at both the camera and cabinet ends.
- Contractor shall install the video detection system in compliance with the manufacture's and City of Colorado Springs installation instructions and recommendations. **Cameras will be mounted on a min 6' ASTRO-BRAC bracket attached to the mast arms at a location determined by City Traffic Signal.** The Contractor shall install, make fully operational, and test the system as indicated on the intersection drawings and this specification.
- During construction projects it is common for contractors to used video detection systems for temporary traffic signals. When construction projects last longer than the warranty period for equipment being used on the project, new equipment shall be installed on the final signal configurations before new signals will be accepted.

37.14 BID ITEMS

37.14.1 Cabinet Pre-wire & Video Surge Suppressor Installation:

Included in this item is the cabinet pre-wire, including mounting surge suppressors (one for each camera at the intersection) onto an attachment plate and mounting the assembly to the cabinet, terminating the video cables & attaching them to the suppressors, installing of fuse assemblies, and routing of cables & wire in the cabinet. This work shall be done only after the contractor personnel has received training & is certified to do the work in a satisfactory manner by the City signal technicians.

37.14.2 Video Camera & Cable Installation-Overhead (Span-Wire Signals):The coax cable shall be installed as a continuous unbroken run from the camera into the cabinet. Also included is attaching the camera mounting brackets with 3 clamps per bracket, installing & hook-up of the camera, pointing at the approaching lanes as indicated by the site survey, securing and testing the installation. Contractor is responsible for miscellaneous items such as any required tape, tie straps, BNC connectors, OH rings, hand tools, etc., and are included in this item and shall not be paid for separately.

37.14.2 Video Camera & Cable Installation-In Conduits (Mast Arm Signals)

The coax cable shall be installed as a continuous unbroken run from the camera into the cabinet. Also included is attaching the camera mounting brackets Astro-Brac , installing & hook-up of the camera, pointing at the approaching lanes as indicated by the site survey. Miscellaneous items such as any required tape, cleaning minor amounts of debris from conduits, providing hand tools, ect. are included in this item and shall not be paid for separately.

37.15 WARRANTY

- The video detection system shall be warranted to be free of defects in material and workmanship for a period of two years from date of installation or thirty months from the date of shipment, whichever comes first. During the warranty period, the supplier shall repair with new materials, or replace at no charge, any product containing a warrantee defect. This warranty does not apply to products damaged by accident, misuse, abuse, improper operation, service by unauthorized personnel, or unauthorized modification.
- During the warranty period, technical support shall be available from the supplier via telephone within 4 hours of the time a call is made by a user, and this support shall be available from factory-certified personnel or factory-certified installers.
- During the warranty period, updates to software shall be available from the supplier without charge.

37.16 MAINTENANCE AND SUPPORT

- The supplier shall maintain an adequate inventory of parts to support maintenance and repair of the video detection system. These parts shall be available for delivery within 30 days of placement of an acceptable order at the supplier's then current pricing and terms of sale for said parts. The supplier shall maintain an ongoing program of technical support for the video detection system.
- Installation or training support shall be provided by a factory authorized representative.
- The video detection Supplier shall provide all documentation necessary to maintain and operate the system. All product documentation shall be written in the English language.